DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		030452	1	23

(2) FRONT ST. RR SIG. & HWY. 71/FRONT ST. TRAFFIC SIG. (ASHDOWN) (S)

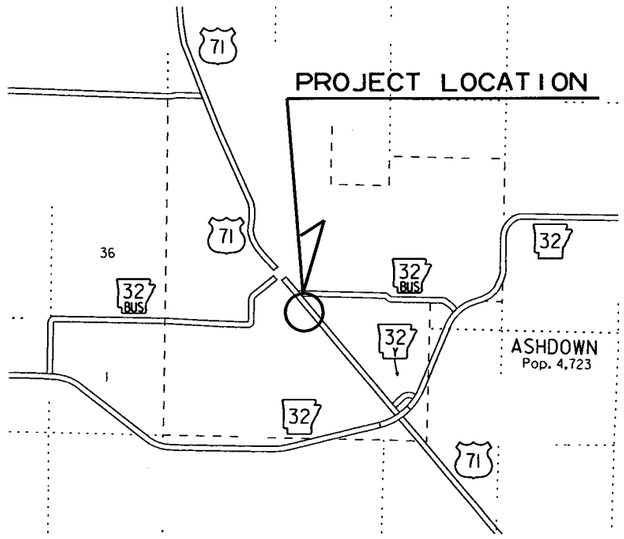

VICINITY MAP

ARKANSAS STATE HIGHWAY AND TRANSPORTATION DEPARTMENT
CONSTRUCTION PLANS FOR STATE HIGHWAY

FRONT ST. RR SIG. & HWY. 71/FRONT ST. TRAFFIC SIG. (ASHDOWN) (S)

LITTLE RIVER COUNTY

ROUTE 71 SECTION 4

F.A.P. RPD-0041(34)

JOB 030452

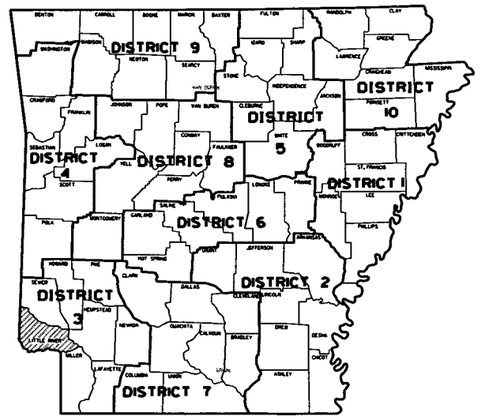

ARK. HWY. DIST. NO. 3

NOT TO SCALE

PROJECT LOCATION

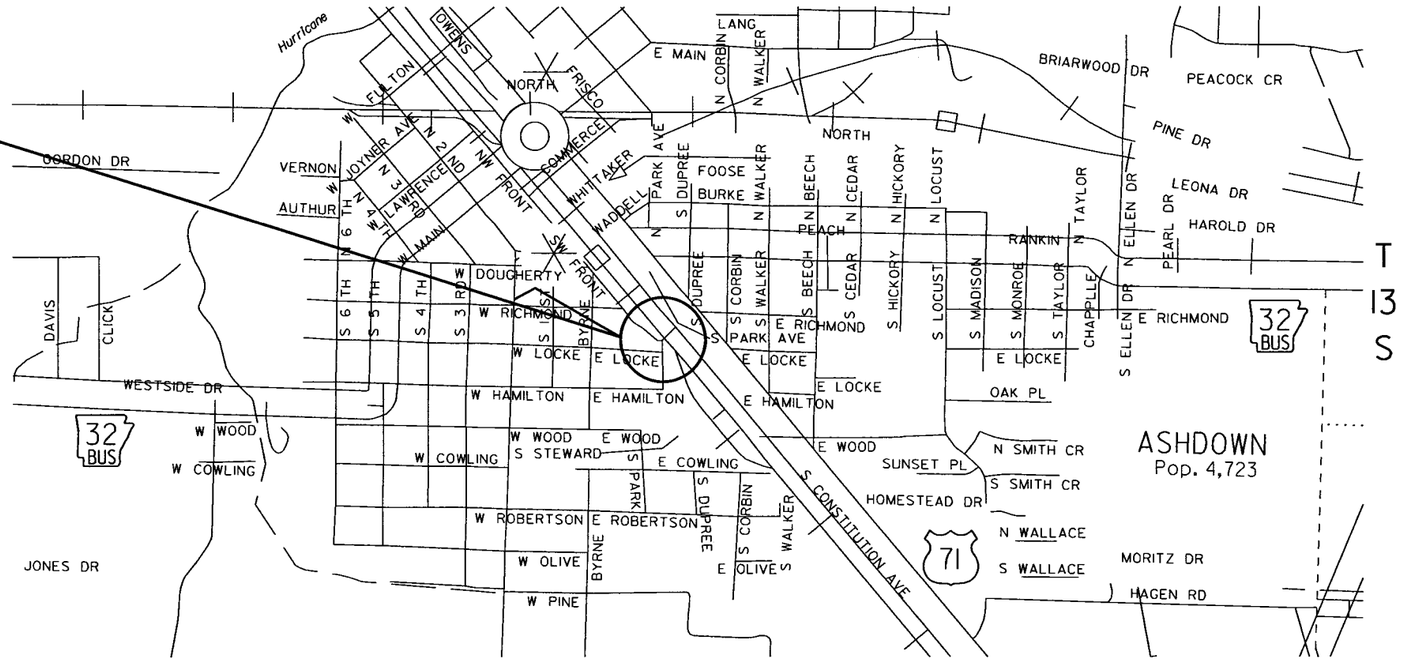

MID-POINT OF PROJECT
LAT. = N 33° 40' 11.38"
LONG. = W 94° 7' 38.63" W

APPROVED

STATE OF ARKANSAS
REGISTERED PROFESSIONAL ENGINEER
No. 7836
M. B. BANKS

1-19-17

DEPUTY DIRECTOR
AND CHIEF ENGINEER

1030452_job.dgn 1-19-17

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		030452	2	23

(2) INDEX OF SHEETS, GOV. SPECS., AND NOTES

INDEX OF SHEETS

GOVERNING SPECIFICATIONS

ARKANSAS STATE HIGHWAY COMMISSION STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION, EDITION OF 2014, AND THE FOLLOWING SPECIAL PROVISIONS AND SUPPLEMENTAL SPECIFICATIONS:

NUMBER	TITLE
ERRATA_____	ERRATA FOR THE BOOK OF STANDARD SPECIFICATIONS
FHWA-1273___	REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS
FHWA-1273__	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - NOTICE TO CONTRACTORS
FHWA-1273__	SUPPLEMENT - SPECIFIC EQUAL EMPLOYMENT OPPORTUNITY RESPONSIBILITIES (23 U.S.C. 140)
FHWA-1273__	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - GOALS AND TIMETABLES
FHWA-1273__	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - FEDERAL STANDARDS
FHWA-1273__	SUPPLEMENT - POSTERS AND NOTICES REQUIRED FOR FEDERAL-AID PROJECTS
FHWA-1273__	SUPPLEMENT - WAGE RATE DETERMINATION
100-3_____	CONTRACTOR'S LICENSE
102-2_____	ISSUANCE OF PROPOSALS
108-1_____	LIQUIDATED DAMAGES
108-2_____	WORK ALLOWED PRIOR TO ISSUANCE OF WORK ORDER
604-1_____	RETROREFLECTIVE SHEETING FOR TRAFFIC CONTROL DEVICES IN CONSTRUCTION ZONES
JOB 030452__	BIDDING REQUIREMENTS AND CONDITIONS
JOB 030452__	CABINET DRAWER ASSEMBLY
JOB 030452__	CARGO PREFERENCE ACT REQUIREMENTS
JOB 030452__	DELAY IN RIGHT OF WAY OCCUPANCY
JOB 030452__	DOCUMENTATION OF PAYMENTS MADE TO DISADVANTAGED BUSINESS ENTERPRISES
JOB 030452__	EDGE CARD VIDEO PROCESSOR
JOB 030452__	ELECTRICAL CONDUCTORS FOR LUMINAIRES
JOB 030452__	ELECTRICAL CONDUCTORS-IN-CONDUIT
JOB 030452__	EMERGENCY BATTERY BACKUP SYSTEM INSTALLATION
JOB 030452__	FIBER OPTIC BLANK OUT SIGN
JOB 030452__	INSURANCE, CONSTRUCTION, AND FLAGGING REQUIREMENTS ON RAILROAD PROPERTY (KCS)
JOB 030452__	LED LUMINAIRE ASSEMBLY (BUG U0 TYPE)
JOB 030452__	LED TRAFFIC SIGNAL HEAD
JOB 030452__	MANDATORY ELECTRONIC CONTRACT
JOB 030452__	MANDATORY ELECTRONIC DOCUMENT SUBMITTAL
JOB 030452__	SERVICE POINT ASSEMBLY (TRAFFIC CONTROL DEVICES)
JOB 030452__	STREET NAME SIGN (MAST ARM MOUNTED)
JOB 030452__	UTILITY ADJUSTMENTS
JOB 030452__	VIDEO DETECTOR (COLOR)

STATE OF ARKANSAS
REGISTERED PROFESSIONAL ENGINEER
No. 11425
TRINITY D. SMITH
1-18-17

TRAFFIC SIGNAL NOTES:

1. PERFORM ELECTRICAL WORK IN ACCORDANCE WITH THE CURRENT EDITIONS OF THE NFPA 70 (2014) NATIONAL ELECTRICAL CODE, NFPA 101 (2012) LIFE SAFETY CODE, STATE ELECTRICAL CODE AND LOCAL ELECTRICAL CODE.
2. EXTEND GREEN EQUIPMENT GROUNDING CONDUCTOR (E.G.C.) FROM GROUND BAR AT MAIN BREAKER TO CONTROL PANEL AND TO FIRST POLE. SOLIDLY BOND EGC TO GROUND LUG OF CONTROL CABINET AND TO POLE GROUND. ENSURE THAT ONLY ONE NEUTRAL-TO-GROUND BOND EXISTS IN THE SYSTEM AND THAT IT IS AT THE MAIN BREAKER.
3. ELECTRICAL SERVICE SHALL BE PROVIDED BY THE CITY TO A SERVICE POLE WITH EXTERNAL RAINTIGHT BREAKER (MAIN BREAKER), GALVANIZED STEEL SERVICE RISER, METER LOOP (IF REQUIRED), AND WEATHERHEAD AT A MUTUALLY ACCEPTABLE POINT WITHIN THE RIGHT-OF-WAY. IF THE SERVICE POINT IS OVER 10 FEET FROM THE CONTROLLER, THE CONTRACTOR SHALL PROVIDE AND INSTALL A SEPARATE TWO CIRCUIT EXTERNAL BREAKER (SECONDARY BREAKER) ON OR NEAR THE TRAFFIC SIGNAL CONTROLLER CABINET AND SHALL INSTALL CONDUIT, ELECTRICAL SERVICE WIRE (2c/#6 USE RATED, WITH GROUND TYPICAL), AND PERFORM WIRING TO TAP INTO THE CITY'S MAIN BREAKER AS PART OF THIS CONTRACT. CONDUIT IS PAID FOR AS A SEPARATE ITEM OF THIS CONTRACT. TWO CIRCUIT BREAKERS, CONSIDERED SUBSIDIARY TO THE CONTROL EQUIPMENT, ARE NEEDED WHERE STREET LIGHTING IS INCLUDED. AS PART OF THE SIGNAL INSTALLATION, STREET LIGHTING CIRCUIT (2c/#12 A.W.G. UF RATED, TYPICAL) SHALL BE KEPT FROM THE CIRCUIT SERVING THE TRAFFIC SIGNAL CONTROL EQUIPMENT FROM THE POINT OF TIE-IN AT THE SECONDARY BREAKER PROVIDED BY THE CONTRACTOR.
4. CONTRACTOR SHALL CONNECT A SEPARATE NEUTRAL FOR EACH LOAD SWITCH REPRESENTED ON EACH SIGNAL POLE.
5. TRAFFIC CONTROLLER CABINET AND LAYOUT SHALL BE SUCH THAT IT IS NOT NECESSARY TO SHUT DOWN POWER OR REMOVE LOAD SWITCHES IN ORDER TO EASILY TEST OR MODIFY DETECTOR INPUTS TO THE CONTROLLER.
6. CONTROLLER CABINET SHALL BE WIRED SUCH THAT DURING FLASH OPERATIONS POWER TO THE LOAD SWITCHES CANNOT BACKFEED TO LOAD SWITCH POWER BUSS.
7. ALL PARTS OF THIS INSTALLATION SHALL BE IN ACCORDANCE WITH THE ARKANSAS HIGHWAY AND TRANSPORTATION DEPARTMENT STANDARDS AND DETAILS AND WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, CURRENT EDITIONS.
8. CONDUIT INSTALLED UNDER ROADWAY SURFACES SHALL BE INSTALLED BY PUSHING OR BORING METHODS. IF THE ENGINEER DETERMINES THIS IS NOT FEASIBLE, THEN A TRENCHING METHOD AS SHOWN IN THE DETAILS MAY BE USED.
9. TRAFFIC SIGNAL POLES SHALL BE GALVANIZED. BACKPLATES SHALL BE SUPPLIED FOR ALL SIGNAL HEADS.
10. PAVEMENT MARKING SHOWN FOR REFERENCE ONLY. SEE PAVEMENT MARKING PLAN SHEETS.
11. FOUNDATION FOR ALL POLES SHALL BE EXTENDED IF NECESSARY TO ACCOMMODATE THE REQUIREMENTS FOR SIGNAL HEAD CLEARANCE ABOVE ROADWAY ONLY AT LOCATIONS WHERE THE GROUND ELEVATION AT THE POLE IS BELOW THE ELEVATION OF THE ROADWAY (SEE NOTES ON SPECIAL DETAILS). PAYMENT WILL BE INCLUDED IN SECTION 714 AHTD STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION.
12. ALL PULL BOXES SHALL BE (TYPE 2 HD) UNLESS OTHERWISE INDICATED. ALL CONDUIT SHALL BE 3" DIAMETER UNLESS SPECIFIED ON PLANS.
13. CONTRACTOR SHALL NOTIFY ALL EXISTING UTILITY OWNERS BEFORE BEGINNING WORK ON THIS PROJECT.
14. LUMINAIRE ASSEMBLIES SHALL BE OF THE FULL CUTOFF TYPE.
15. HARDWARE INPUTS MAY BE DETERMINED BY SUPPLIER. EACH DETECTOR OUTPUT SHALL INPUT THE CONTROLLER THROUGH A SEPARATE INPUT UNLESS OTHERWISE NOTED AND BE PROGRAMMED TO ACTUATE THE ASSOCIATED PHASE. COMBINATION (COMB.) DETECTORS SHALL ALSO BE PROGRAMMED TO PROVIDE VEHICLE COUNT/OCCUPANCY DATA.
16. TO DETERMINE UTILITY CLEARANCES ABOVE THE TRAFFIC SIGNAL POLE, REFER TO THE POLE SCHEDULE FOR VERTICAL SHAFT HEIGHT. WHERE THE POLE SCHEDULE INDICATES THAT A LUMINAIRE ARM WILL BE USED, 38 FEET SHOULD BE USED TO DETERMINE UTILITY CLEARANCE ABOVE THE LUMINAIRE ARM. WHERE THE POLE SCHEDULE INDICATES A TRAFFIC SIGNAL POLE WITHOUT A LUMINAIRE ARM, A HEIGHT OF 21' SHOULD BE USED TO DETERMINE UTILITY CLEARANCE ABOVE THE TRAFFIC SIGNAL MAST ARM. AN ADDITIONAL 6 FEET SHOULD BE USED DIRECTLY ABOVE 'VIDEO DETECTOR' AT LOCATIONS SHOWN ON THE SIGNAL PLANS.
17. THE DESIRABLE MINIMUM DISTANCE FROM THE FACE OF ROADWAY CURB OR SHOULDER EDGE TO THE FACE OF NON-BREAKAWAY POLE OR OBSTRUCTION IS 6 FEET. REFER TO TRAFFIC SIGNAL PLANS FOR SPECIFIC LOCATION OF POLES, CONTROLLER AND ANY OTHER NON-BREAKAWAY OBSTRUCTIONS. REFER TO 'DESIGN PARAMETERS, MINIMUM CLEAR ZONE DISTANCE' FOR MINIMUM DISTANCE FROM THE EDGE OF TRAVELED WAY TO THE FACE OF A NON-BREAKAWAY POLE OR OBSTRUCTION. TRAFFIC SIGNAL POLES OR ANY OTHER NON-BREAKAWAY OBSTRUCTION SHALL NOT BE INSTALLED WITHIN THE CLEAR ZONE.
18. AS DETERMINED BY THE ENGINEER, FOUNDATION EMBEDMENT MAY BE DECREASED BY A MAXIMUM OF TWO FEET IF COMPETENT ROCK IS ENCOUNTERED PRIOR TO ACHIEVING PLAN EMBEDMENT AND AT LEAST HALF OF THE REMAINING PLAN EMBEDMENT LENGTH IS KEYED INTO COMPETENT ROCK.
19. CONNECTION OF TRAFFIC SIGNAL DISPLAY TO FIELD WIRING SHALL UTILIZE AN APPROVED TERMINAL STRIP BEHIND HAND-HOLE COVER AT BASE OF POLE. TERMINAL STRIP SHALL PROVIDE PROTECTION TO PREVENT EXPOSURE TO THE PUBLIC IN THE EVENT THAT POLE COVER IS MISSING. PAYMENT FOR TERMINAL STRIPS SHALL BE INCLUDED IN ITEM 714-TRAFFIC SIGNAL MAST ARM AND POLE WITH FOUNDATION.
20. CONTROLLER CABINET LAYOUT AND ORIENTATION SHALL CONFORM TO IMSA STANDARDS.
21. ONE VIDEO PROGRAMMING MODULE SHALL BE PROVIDED FOR AIMING AND SETUP OF DETECTORS IF THE VIDEO SYSTEM CANNOT BE ADJUSTED THROUGH HARDWARE AND SOFTWARE PROVIDED BY ITEMS WITHIN THE JOB.
22. TRAFFIC SIGNAL CONTRACTOR MUST NOTIFY RESIDENT ENGINEER OR ASSIGNED DEPARTMENT PROJECT INSPECTOR EACH DAY PRIOR TO SIGNAL RELATED WORK. NO WORK ON TRAFFIC SIGNALS WILL BE ALLOWED OR APPROVED WITHOUT THIS PRIOR NOTIFICATION.
23. ALL STEEL POLES SHALL BE DESIGNED TO MEET THE AASHTO STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES AND TRAFFIC SIGNALS, 4th EDITION (2001) WITH 2003 AND 2006 INTERIMS.
24. DOOR PANEL TEST PUSH BUTTONS SHALL ACTUATE INDICATED PHASES. DETECTOR ASSIGNMENTS AND/OR SIDE PANEL JUMPERS MAY REQUIRE MODFICATION.
25. ALL SYSTEM DETECTOR RACKS AND ASSOCIATED EQUIPMENT SHALL BE PROTECTED BY THE MAIN CONTROLLER CABINET POWER SURGE PROTECTION.

T090452_job.dgn 12/12/2016

DATE: 12/12/2016 FILE NAME: t090452_job.dgn

LOCATION:	HWY. 71/FRONT ST.		
CITY:	ASHDOWN		
COUNTY:	LITTLE RIVER		
DISTRICT:	3	SCALE: N/A	DRAWN BY: CJS

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		030452	3	23

(2) MAINTENANCE OF TRAFFIC

NOTE TO CONTRACTOR:
1. ALL TRAFFIC CONTROL SIGNS SHOULD BE SPACED 500 FEET APART AND 500 FEET FROM THE BEGINNING OF WORK AROUND THE INTERSECTION PER MUTCD (2009).

STATE OF ARKANSAS
REGISTERED PROFESSIONAL ENGINEER
No. 11425
TRINITY D. SMITH
12-12-16

DUPREE ST.

RICHMOND ST.

END ROAD WORK
(1) G20-2 (48" x 24")

110 LIN. FT. OF CONCRETE CURB (TYPE D)

(1) W20-1 (48" x 48") ROAD WORK 500 FT

(1) W20-1 (48" x 48") ROAD WORK 1000 FT

(1) W20-1 (48" x 48") ROAD WORK 1500 FT

AHTD ROW

HWY. 71

N 38°13'20" W

HWY. 71

105

104

(1) G20-2 (48" x 24") END ROAD WORK

KCS RR TRACKS

(1) W20-1 (48" x 48") ROAD WORK 1500 FT

(1) W20-1 (48" x 48") ROAD WORK 1000 FT

(1) W20-1 (48" x 48") ROAD WORK 500 FT

AHTD & KCS RR ROW

END ROAD WORK
(1) G20-2 (48" x 24")

FRONT ST.

ROAD WORK AHEAD
(1) W20-1 (48" x 48")

FRONT ST.

STEWARD ST.

KCS RR ROW

(1) W20-1 (48" x 48") ROAD WORK AHEAD

(1) G20-2 (48" x 24") END ROAD WORK

SCALE IN FEET
0 20 40 80

DATE: 12-9-2016 FILE NAME: t030452.dgn

LOCATION:	HWY. 71/FRONT ST.		
CITY:	ASHDOWN		
COUNTY:	LITTLE RIVER		
DISTRICT:	4	SCALE: 1"=40'	DRAWN BY: CJS

T030452.DGN 12/9/2016

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		030452	4	23

(2) PERMANENT PAVEMENT MARKINGS

STATE OF ARKANSAS
REGISTERED PROFESSIONAL ENGINEER
No. 11425
TRINITY D. SMITH
12-12-16

+99.30

REMOVE CONFLICTING PAVEMENT MARKINGS

+33.32

AHTD ROW

RICHMOND ST.

DUPREE ST.

6" DBL. YELLOW THERMOPLASTIC = 400 LIN. FT.
R.P.M. (TYPE II) (YELLOW/YELLOW) 80' O.C.

8" YELLOW THERMOPLASTIC = 170 LIN. FT.

110 LIN. FT. OF CONCRETE CURB (TYPE D)

6" WHITE THERMOPLASTIC = 100 LIN. FT.
R.P.M. (TYPE II) (WHITE/RED) 40' O.C.

INSTALL "ONLY"

INSTALL "ARROW"

200'

100'

100'

HWY. 71 N 38°13'20" W

108

103

105

200'

HWY. 71

6" YELLOW THERMOPLASTIC = 200 LIN. FT.
6" YELLOW SKIP THERMOPLASTIC = 50 LIN. FT.
R.P.M. (TYPE II) YELLOW/YELLOW) 80' O.C.

6" WHITE SKIP THERMOPLASTIC = 100 LIN. FT.
R.P.M. (TYPE II) WHITE/RED) 80' O.C.

24" WHITE THERMOPLASTIC STOP LINE = 36 LIN. FT.

AHTD & KCS RR ROW

6" WHITE SKIP THERMOPLASTIC = 100 LIN. FT.
R.P.M. (TYPE II) WHITE/RED) 80' O.C.

24" WHITE THERMOPLASTIC STOP LINE = 17 LIN. FT.

6" DBL. YELLOW THERMOPLASTIC = 400 LIN. FT.
R.P.M. (TYPE II) (YELLOW/YELLOW) 80' O.C.

FRONT ST.

4" DBL. YELLOW THERMOPLASTIC = 84 LIN. FT.

24" WHITE THERMOPLASTIC STOP LINE = 38 LIN. FT.

FRONT ST.

STEWARD ST.

SCALE IN FEET
0 20 40 80

DATE: 12-9-2016 FILE NAME: t030452.dgn

LOCATION:	HWY. 71/FRONT ST.		
CITY:	ASHDOWN		
COUNTY:	LITTLE RIVER		
DISTRICT:	4	SCALE: 1"=40'	DRAWN BY: CJS

T030452.DGN 12/9/2016

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		030452	5	23

(2) QUANTITIES

STATE OF ARKANSAS
REGISTERED PROFESSIONAL ENGINEER
No. 11425
TRINITY D. SMITH
12-12-16

CONSTRUCTION PAVEMENT MARKINGS AND PERMANENT PAVEMENT MARKINGS

DESCRIPTION	END OF JOB	REMOVAL OF PERMANENT PAVEMENT MARKINGS	RAISED PAVEMENT MARKERS		THERMOPLASTIC PAVEMENT MARKING					
			TYPE II (WHITE/RED)	TYPE II (YEL/YEL)	6" WHITE	6" YELLOW	8" YELLOW	24" WHITE	WORDS	ARROWS
	LIN. FT. - EACH	LIN. FT.	EACH		LIN. FT.				EACH	
REMOVAL OF PERMANENT PAVEMENT MARKINGS	1440	1440								
RAISED PAVEMENT MARKERS TYPE II (WHITE/RED)	12		12							
RAISED PAVEMENT MARKERS TYPE II (YEL/YEL)	8			8						
THERMOPLASTIC PAVEMENT MARKING WHITE (6")	300				300					
THERMOPLASTIC PAVEMENT MARKING YELLOW (6")	1134					1134				
THERMOPLASTIC PAVEMENT MARKING YELLOW (8")	170						170			
THERMOPLASTIC PAVEMENT MARKING WHITE (24")	91							91		
THERMOPLASTIC PAVEMENT MARKING WORDS	1								1	
THERMOPLASTIC PAVEMENT MARKING ARROWS	1									1
TOTALS:		**1440**	**12**	**8**	**300**	**1134**	**170**	**91**	**1**	**1**

NOTE: THIS IS A LOW TRAFFIC VOLUME ROAD AS DEFINED IN SECTION 604.03, STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION.

ADVANCE WARNING SIGNS AND DEVICES

SIGN NUMBER	DESCRIPTION	SIGN SIZE	MAXIMUM NUMBER REQUIRED	TOTAL SIGNS REQUIRED	
				NO.	SQ. FT.
W20-1 .	ROAD WORK 1500 FT.	48"x48"	2	2	32.0
W20-1	ROAD WORK 1000 FT.	48"x48"	2	2	32.0
W20-1	ROAD WORK 500 FT.	48"x48"	2	2	32.0
W20-1	ROAD WORK AHEAD	48"x48"	2	2	32.0
G20-2	END ROAD WORK	48"x24"	4	4	32.0
TOTAL:					**160.0**

NOTE: THIS IS A LOW TRAFFIC VOLUME ROAD AS DEFINED IN SECTION 604.03, STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION.

EROSION CONTROL

STATION	STATION	LOCATION	PERMANENT EROSION CONTROL	
			WATER	SOLID SODDING
			M.GAL.	SQ.YD.
105+49.00	105+93.50	HWY. 71 - RIGHT SIDE	0.6	49
TOTALS:			**0.6**	**49**

BASIS OF ESTIMATE:
WATER.....12.6 GAL. / SQ. YD. OF SOLID SODDING

CONCRETE CURB

STATION	STATION	LOCATION	TYPE D
			LIN. FT.
105+49.00	105+93.50	HWY. 71 - RIGHT SIDE	110
TOTAL:			**110**

EARTHWORK

STATION	STATION	LOCATION / DESCRIPTION	UNCLASSIFIED EXCAVATION	COMPACTED EMBANKMENT
			CU. YD.	
105+49.00	105+93.50	HWY. 71 - RIGHT SIDE	19	25
TOTALS:			**19**	**25**

* QUANTITY ESTIMATED.
SEE SECTION 104.03 OF THE STD. SPECS.

NOTE: EARTHWORK QUANTITIES SHOWN ABOVE SHALL BE PAID AS PLAN QUANTITY.

T030452.DGN 12/8/2016

DATE: 12/8/2016 FILE NAME: t030452.dgn

LOCATION: HWY. 71/FRONT ST.
CITY: ASHDOWN
COUNTY: LITTLE RIVER
DISTRICT: 3 SCALE: N/A DRAWN BY: CJS

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		030452	6	23

(2) SUMMARY OF QUANTITIES & REVISIONS

STATE OF ARKANSAS
REGISTERED PROFESSIONAL ENGINEER
No. 11425
TRINITY D. SMITH
12-12-16

SUMMARY OF QUANTITIES

	ITEM NUMBER	ITEM	QUANTITY	UNIT
	210	UNCLASSIFIED EXCAVATION	19	CU. YD.
	210	COMPACTED EMBANKMENT	25	CU. YD.
	601	MOBILIZATION	1.00	LUMP SUM
	603	MAINTENANCE OF TRAFFIC	1.00	LUMP SUM
	SS & 604	SIGNS	160	SQ. FT.
	604	REMOVAL OF PERMANENT PAVEMENT MARKINGS	1440	LIN. FT.
	620	WATER	0.6	M. GAL.
	624	SOLID SODDING	49	SQ. YD.
	634	CONCRETE CURB (TYPE D)	110	LIN. FT.
	SP & 701	ACTUATED CONTROLLER TS2-TYPE 2 (8 PHASES)	1	EACH
	SP	BATTERY BACKUP SYSTEM	1	EACH
	SP	FIBER OPTIC BLANK OUT SIGN	2	EACH
	SP & 706	TRAFFIC SIGNAL HEAD, LED, (3 SECTION, 1 WAY)	6	EACH
	SP & 706	TRAFFIC SIGNAL HEAD, LED, (4 SECTION, 1 WAY)	1	EACH
	708	TRAFFIC SIGNAL CABLE (5C/14 A.W.G.)	229	LIN. FT.
	708	TRAFFIC SIGNAL CABLE (7C/14 A.W.G.)	90	LIN. FT.
	708	TRAFFIC SIGNAL CABLE (12C/14 A.W.G.)	300	LIN. FT.
	708	TRAFFIC SIGNAL CABLE (20C/14 A.W.G.)	149	LIN. FT.
	SP	ELECTRICAL CONDUCTORS-IN-CONDUIT (1C/8 A.W.G., E.G.C.)	171	LIN. FT.
	SP	ELECTRICAL CONDUCTORS-IN-CONDUIT (1C/12 A.W.G., E.G.C.)	56	LIN. FT.
	SP	ELECTRICAL CONDUCTORS-IN-CONDUIT (2C/6 A.W.G.)	22	LIN. FT.
	SP	ELECTRICAL CONDUCTORS FOR LUMINAIRES	80	LIN. FT.
	709	GALVANIZED STEEL CONDUIT (1.25")	20	LIN. FT.
	710	NON-METALLIC CONDUIT (1.25")	20	LIN. FT.
	710	NON-METALLIC CONDUIT (3")	131	LIN. FT.
	711	CONCRETE PULL BOX (TYPE 1 HD)	1	EACH
	711	CONCRETE PULL BOX (TYPE 2 HD)	2	EACH
	714	TRAFFIC SIGNAL MAST ARM AND POLE WITH FOUNDATION (32')	1	EACH
	714	TRAFFIC SIGNAL MAST ARM AND POLE WITH FOUNDATION (42'-32')	1	EACH
	SP	LED LUMINAIRE ASSEMBLY	1	EACH
	SP	SERVICE POINT ASSEMBLY (2 CIRCUITS)	1	EACH
	719	THERMOPLASTIC PAVEMENT MARKING WHITE (6")	300	LIN. FT.
	719	THERMOPLASTIC PAVEMENT MARKING WHITE (24")	91	LIN. FT.
	719	THERMOPLASTIC PAVEMENT MARKING YELLOW (6")	1134	LIN. FT.
	719	THERMOPLASTIC PAVEMENT MARKING YELLOW (8")	170	LIN. FT.
	719	THERMOPLASTIC PAVEMENT MARKING (WORDS)	1	EACH
	719	THERMOPLASTIC PAVEMENT MARKING (ARROWS)	1	EACH
	721	RAISED PAVEMENT MARKERS (TYPE II)	20	EACH
	SP	18" STREET NAME SIGN	2	EACH
*	SP & 733	VIDEO DETECTOR (CLR)	6	EACH
	733	VIDEO CABLE	544	LIN. FT.
	733	VIDEO MONITOR (CLR)	1	EACH
*	SP & 733	VIDEO PROCESSOR, EDGE CARD (2 CAMERA)	4	EACH
	SP & 733	VEHICLE DETECTOR RACK (16 CHANNEL)	1	EACH

* ONE SPARE VIDEO DETECTOR AND ONE SPARE VIDEO PROCESSOR SHALL BE SUPPLIED.

REVISIONS

DATE	REVISION	SHEET NUMBER

T030452.DGN 12/9/2016

DATE: 12/9/2016 FILE NAME: t030452.dgn

LOCATION: HWY. 71/FRONT ST.
CITY: ASHDOWN
COUNTY: LITTLE RIVER
DISTRICT: 3 SCALE: N/A DRAWN BY: CJS

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		030452	7	23

(2) SURVEY CONTROL DETAILS

STATE OF ARKANSAS
REGISTERED PROFESSIONAL ENGINEER
No. 11425
TRINITY D. SMITH
12-12-16

SURVEY CONTROL COORDINATES

Project Name: s030452
Date: 2/26/2016
Coordinate System: ARKANSAS STATE PLANE - SOUTH ZONE BASED ON GPS CONTROL, PROJECTED TO GROUND.
Units: U.S. SURVEY FOOT

Point Name	Northing	Easting	Elev	Feature	Description
1	1684548.4226	664902.2126	330.163	CTL	STD AHTD MON. STAMPED PN: 1 ASHDOWN
2	1684230.9692	665156.7961	329.871	CTL	STD AHTD MON. STAMPED PN: 2 ASHDOWN
3	1683805.6124	665504.5219	329.518	CTL	STD AHTD MON. STAMPED PN: 3 ASHDOWN
4	1683740.9244	665128.6460	330.303	CTL	STD AHTD MON. STAMPED PN: 4 ASHDOWN
100	1677307.5785	670743.6700	325.462	GPS	AHTD GPS MON 410002
101	1685845.8104	664566.6227	329.255	GPS	NGS BM MON X 303
900	1684649.3703	664845.8902	329.976	TBM	SQUARE CUT IN CA ASHDOWN
901	1684009.1061	665337.7011	329.191	TBM	SQ CUT IN CENTER OF HW ASHDOWN

*Note - Rebar and Cap - Standard - 5/8" Rebar with 2" Aluminum Cap stamped
*(standard markings common to all caps), or as indicated
(other markings indicated in the point description of the individual point).
ALL DISTANCES ARE GROUND.
USE CAF = 1.0 FOR STAKEOUT FOR THIS PROJECT.
A PROJECT CAF OF 0.9999230615 HAS BEEN USED TO COMPUTE THE ABOVE GROUND COORDINATES.
THIS CAF IS INTENDED FOR USE WITHIN THE PROJECT LIMITS.
GRID DISTANCE = GROUND DISTANCE X CAF.
GRID COORDINATES ARE STORED UNDER FILE NAME s030452gi.CTL
HORIZONTAL DATUM: NAD 83 (1997)
VERTICAL DATUM: NAVD 88 POSITIONAL ACCURACY THIRD ORDER, UNLESS SPECIFIED OTHERWISE AT A SPECIFIC POINT.

REFERENCE POINTS (1500 SERIES) ARE TO BE USED TO ESTABLISH CONTROL IF THE PRIMARY CONTROL POINTS LISTED ABOVE HAVE BEEN DESTROYED.
REFERENCE POINTS ARE NOT TO BE USED FOR VERTICAL CONTROL

BASIS OF BEARING:
ARKANSAS STATE PLANE GRID BEARINGS - 0302-SOUTH ZONE
DETERMINED FROM GPS CONTROL POINTS: AHTD GPS MON 410002 & NGS BM MON X 303
CONVERGENCE ANGLE: 01 11 27 LEFT AT PN: 2 LT: N 33-40-11.45 LG: W 94-07-38.84
GRID AZIMUTH = ASTRONOMICAL AZIMUTH - CONVERGENCE ANGLE.

T030452.DGN 12/9/2016

DATE: 12/9/2016 FILE NAME: t030452.dgn

LOCATION: HWY. 71/FRONT ST.
CITY: ASHDOWN
COUNTY: LITTLE RIVER
DISTRICT: 3 SCALE: N/A DRAWN BY: CJS

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		030452	8	23

(2) SURVEY CONTROL DETAILS

STATE OF ARKANSAS
REGISTERED PROFESSIONAL ENGINEER
No. 11425
TRINITY D. SMITH
12-12-16

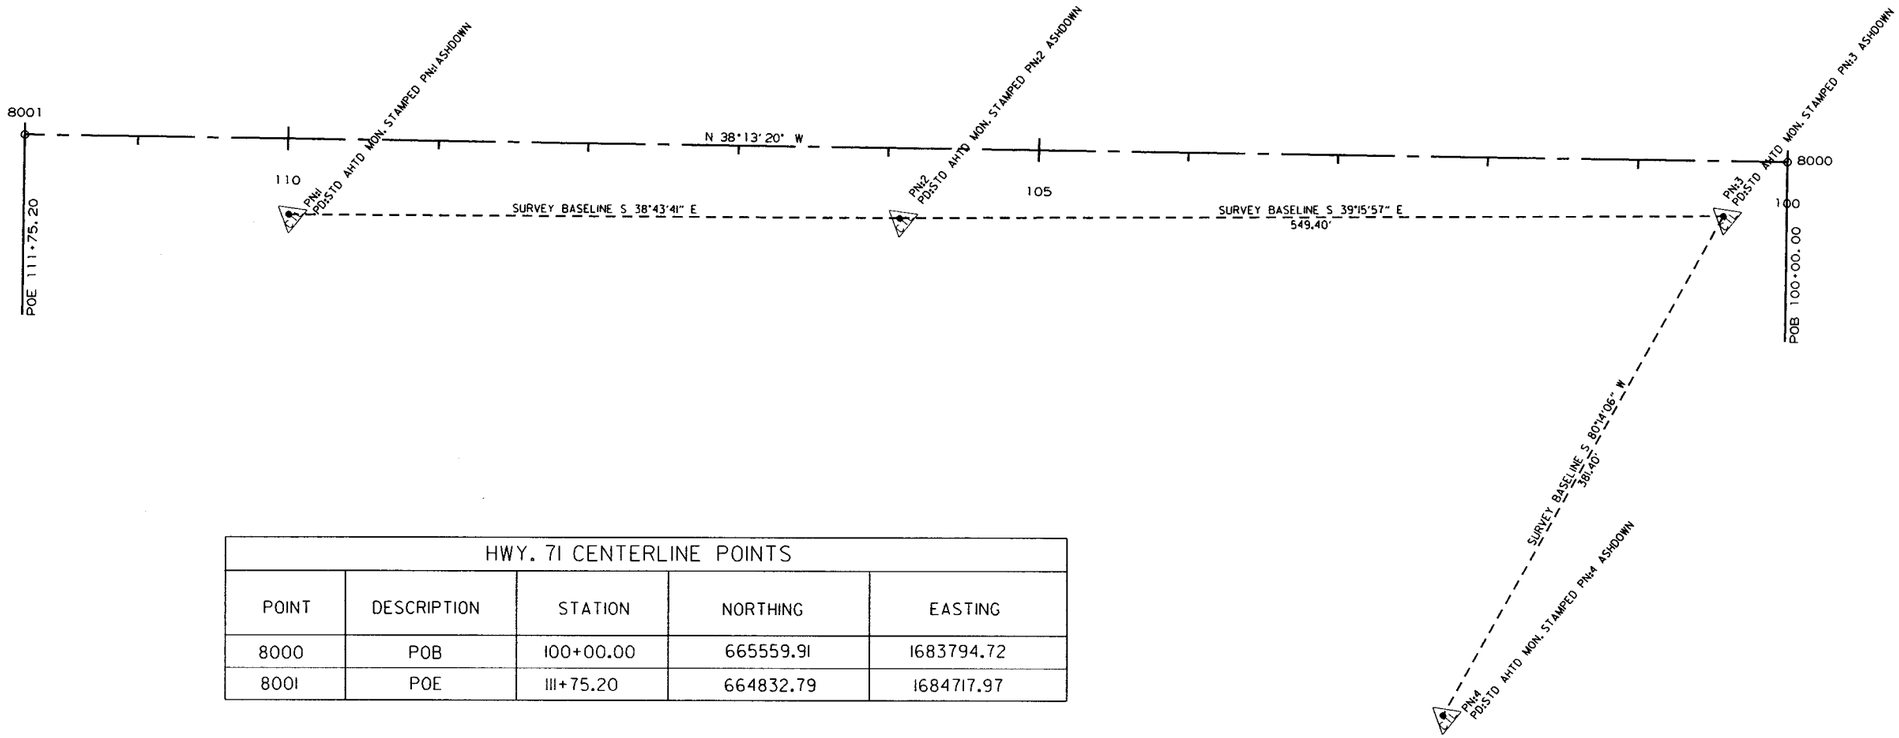

HWY. 71 CENTERLINE POINTS				
POINT	DESCRIPTION	STATION	NORTHING	EASTING
8000	POB	100+00.00	665559.91	1683794.72
8001	POE	111+75.20	664832.79	1684717.97

SCALE IN FEET
0 50 100 200

DATE: 12/9/2016 FILE NAME: t030452.dgn

LOCATION: HWY. 71/FRONT ST.
CITY: ASHDOWN
COUNTY: LITTLE RIVER
DISTRICT: 3 SCALE: 1"=100' DRAWN BY: CJS

T030452.DGN 12/9/2016

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RO. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		030452	9	23
				(2) TRAFFIC SIGNAL QUANTITIES				

STATE OF ARKANSAS
REGISTERED PROFESSIONAL ENGINEER
No. 11425
TRINITY D. SMITH
12-12-16

TRAFFIC SIGNAL QUANTITIES

ITEM NUMBER	ITEM	QUANTITY	UNIT
SP & 701	ACTUATED CONTROLLER TS2-TYPE 2 (8 PHASES)	1	EACH
SP	BATTERY BACKUP SYSTEM	1	EACH
SP	FIBER OPTIC BLANK OUT SIGN	2	EACH
SP & 706	TRAFFIC SIGNAL HEAD, LED, (3 SECTION, 1 WAY)	6	EACH
SP & 706	TRAFFIC SIGNAL HEAD, LED, (4 SECTION, 1 WAY)	1	EACH
708	TRAFFIC SIGNAL CABLE (5C/14 A.W.G.)	229	LIN. FT.
708	TRAFFIC SIGNAL CABLE (7C/14 A.W.G.)	90	LIN. FT.
708	TRAFFIC SIGNAL CABLE (12C/14 A.W.G.)	300	LIN. FT.
708	TRAFFIC SIGNAL CABLE (20C/14 A.W.G.)	149	LIN. FT.
SP	ELECTRICAL CONDUCTORS-IN-CONDUIT (1C/8 A.W.G., E.G.C.)	171	LIN. FT.
SP	ELECTRICAL CONDUCTORS-IN-CONDUIT (1C/12 A.W.G., E.G.C.)	56	LIN. FT.
SP	ELECTRICAL CONDUCTORS-IN-CONDUIT (2C/6 A.W.G.)	22	LIN. FT.
SP	ELECTRICAL CONDUCTORS FOR LUMINAIRES	80	LIN. FT.
709	GALVANIZED STEEL CONDUIT (1.25")	20	LIN. FT.
710	NON-METALLIC CONDUIT (1.25")	20	LIN. FT.
710	NON-METALLIC CONDUIT (3")	131	LIN. FT.
711	CONCRETE PULL BOX (TYPE 1 HD)	1	EACH
711	CONCRETE PULL BOX (TYPE 2 HD)	2	EACH
714	TRAFFIC SIGNAL MAST ARM AND POLE WITH FOUNDATION (32')	1	EACH
714	TRAFFIC SIGNAL MAST ARM AND POLE WITH FOUNDATION (42'-32')	1	EACH
SP	LED LUMINAIRE ASSEMBLY	1	EACH
SP	SERVICE POINT ASSEMBLY (2 CIRCUITS)	1	EACH
SP	18" STREET NAME SIGN	2	EACH
* SP & 733	VIDEO DETECTOR (CLR)	6	EACH
733	VIDEO CABLE	544	LIN. FT.
733	VIDEO MONITOR (CLR)	1	EACH
* SP & 733	VIDEO PROCESSOR, EDGE CARD (2 CAMERA)	4	EACH
SP & 733	VEHICLE DETECTOR RACK (16 CHANNEL)	1	EACH

* ONE SPARE VIDEO DETECTOR AND ONE SPARE VIDEO PROCESSOR SHALL BE SUPPLIED.

OVERHEAD STREET NAME MARKER STANDARD MAST ARM MOUNTED

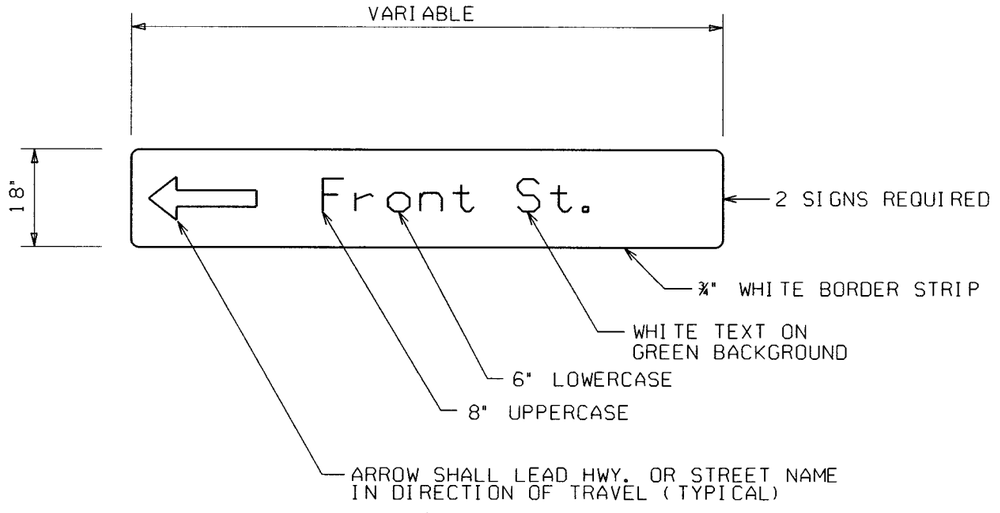

NOTES:
1. REFLECTIVE SHEETING SHALL COMPLY WITH ASTM 4956 TYPE 8 OR 9 REFLECTIVE SHEETING. SHEETING AND LEGEND SHALL BE APPLIED IN SUCH A MANNER TO PROVIDE WRINKLE AND BUBBLE FREE SURFACES. APPLICATION OF SHEETING IS CAUSE FOR REJECTION OF MATERIALS DUE TO WORKMANSHIP.

2. ALUMINUM SIGN BLANK SHALL BE ALLOY 6061-T6 OR 5052-H38. THE ALUMINUM SIGN SHALL ALSO BE ANODIZED. THE ALUMINUM SHEETING SHALL BE 0.100 INCH NOMINAL THICKNESS AND OF THE SIZE SHOWN WITH 1.5" CORNER RADII. PRIOR TO FABRICATION OF THE SIGNS, THE LAYOUT SHALL FIRST BE APPROVED BY AN AGENT OF THE CITY.

3. WHEN CROSSROAD HAS TWO NAMES, THE SIGN FOR THE CROSSROAD TO THE LEFT MAY BE INSTALLED ON THE BACKSIDE OF THE MAST ARM OF THE NEARSIDE LEFT POLE.
SEE STD. DETAIL SHEET FOR MORE INFORMATION FOR MOUNTING ON MAST ARM ASSEMBLY.

4. THE C 2000 STANDARD ALPHABET FONT SHALL BE USED FOR ALL LETTERS.

T030452.DGN 12/9/2016

DATE: 12/9/2016 FILE NAME: t030452.dgn

LOCATION: HWY. 71/FRONT ST.
CITY: ASHDOWN
COUNTY: LITTLE RIVER
DISTRICT: 3 SCALE: N/A DRAWN BY: CJS

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		030452	10	23

(2) SIGNALIZATION PLAN SHEET

HWY. 71/FRONT ST. POLE LOCATIONS

POLE	LOCATION & STATION	OFFSET	X,Y COORDINATES
A	HWY. 71 - STA. 105+30.15	39.56' LT.	665200.82,1684186.73
B	HWY. 71 - STA. 105+88.70	42.36'RT.	665228.95,1684283.42

POLE DIMENSIONS

POLE	MAST ARM(S) LENGTH	MAST ARM'S ORIENTATION ANGLE FROM HAND HOLE (CLOCKWISE)	VERTICAL SHAFT LENGTH	LUM. ARM LENGTH	LUM. ARM'S ORIENTATION ANGLE FROM HAND HOLE (CLOCKWISE)
A	32'	180 DEGREES	35'-0"	15'	180 DEGREES
B	42'/32'	180 DEGREES/90 DEGREES	21'-0"	N/A	N/A

STATE OF ARKANSAS
REGISTERED PROFESSIONAL ENGINEER
No. 11425
TRINITY D. SMITH
12-12-16

AHTD ROW
RICHMOND ST.
110 LIN. FT. OF CONCRETE CURB (TYPE D)
END PROP. C/A +96 40'-51'
PROP. ROW
32'
+48 40'-51'
BEGIN PROP. C/A +16 40'
DUPREE ST.
Vz11 LOCATED 65' FROM STOP LINE
N 38°13'20" W
42'
Vz62A COMB.
Vz62B COMB.
Vz61A
Vz61B
HWY. 71
Vz21B
Vz21A
Vz22B COMB.
Vz22A COMB.
Ø2
Vz12
Ø6
Ø1
Vz11 COMB.
Vz62A&B LOCATED 100' FROM STOP LINE (TYP.)
TYPE I HD PULL BOX
2-3"NMC
32'
105
104
6' X 6' VIRTUAL PULSE VDZ (TYP.)
Vz21A&B LOCATED 230' FROM STOP LINE
6' X 50' VIRTUAL PULSE VDZ (TYP.)
Ø3
Vz31
RR TRACKS
AHTD AND KCS RR ROW
SERVICE POINT AND MAIN BREAKER BY CONTRACTOR WITHIN 10' OF CONTROLLER
BATTERY BACKUP SYSTEM MOUNTED ON CONCRETE PAD NEXT TO CONTROLLER CABINET
FUTURE RR WARNING LIGHTS AND GATE (TYP.) (APPROX. LOCATION)
4"NMC TO BE INSTALLED BY KANSAS CITY SOUTHERN RAILWAY COMPANY
KANSAS CITY SOUTHERN RAILWAY CO.
SOUTHERN SUBDIVISION
CROSSING DOT#330-578C
MILEPOST 468.09
FUTURE RR BUNGALOW (APPROX. LOCATION)
FRONT ST.
FRONT ST.
STEWARD ST.
LOCKE ST.
KCS RR ROW

PHASING DIAGRAM

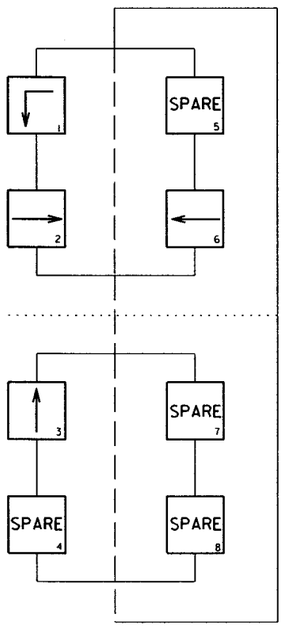

SIGNAL FACES

12" LENSES

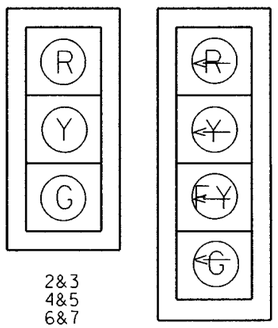

FIBER OPTIC BLANK OUT SIGNS

FOR POLES A AND B

DETECTOR SPACING CHART

HWY. 71 MAIN LANE VIRTUAL VDZ		
POSTED SPEED	DISTANCE FROM STOP BAR	
	LEAD VDZ	LAG VDZ
40 MPH	230'	100'
HWY. 71 LEFT TURN LANE VIRTUAL VDZ		
POSTED SPEED	DISTANCE FROM STOP BAR	
	LEAD VDZ	LAG VDZ
40 MPH	65'	N/A

NOTES:
1. ALL SIGNAL HEADS SHALL HAVE BACKPLATES.

2. SIGNAL FACES 8 & 9 WILL ACTIVATE DURING RAILROAD PREEMPT CLEAR PHASE AND SHALL REMAIN ON THROUGHOUT THE RAILROAD PREEMPT DWELL PHASE.

SCALE IN FEET
0 20 40 80

DATE: 12/9/2016 FILE NAME: t030452.dgn

LOCATION: HWY. 71/FRONT ST.
CITY: ASHDOWN
COUNTY: LITTLE RIVER
DISTRICT: 3 SCALE: 1"=40' DRAWN BY: CJS

T030452.dgn 12/9/2016

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		030452	11	23

(2) SIGNALIZATION PLAN SHEET

STATE OF ARKANSAS
REGISTERED PROFESSIONAL ENGINEER
No. 11425
TRINITY D. SMITH
12-12-16

AHTD ROW

+96 40'-51'

END PROP. C/A

PROP. ROW

+48 40'-51'

+16 40'

BEGIN PROP. C/A

HWY. 71

32'

42'

110 LIN. FT. OF CONCRETE CURB (TYPE D)

Vz62A COMB.

Ø6 Vz62B COMB.

Vz12

Ø1

Vz11 COMB.

Vz22B COMB.

Vz22A COMB.

Ø2

106

105

HWY. 71

2-3"NMC

32'

AHTD & KCS RR ROW

DESIGN PARAMETERS

POSTED SPEED LIMIT:
25 MPH EAST AND WEST APPROACH
40 MPH NORTH AND SOUTH APPROACH
NO BUS STOPS
RAILROAD TRACKS
NO EXISTING INTERCONNECTIONS
NO FIRE STATION
NO PARKING
NO SIGHT DISTANCE RESTRICTIONS

LOCATION OF STOP BARS
SHOWN ON PAVEMENT MARKING PLAN.
SEE SEPARATE SHEET.

MINIMUM CLEAR ZONE DISTANCE
CONTROLLER -
POLE A - 4 FT. BEHIND BACK OF CURB
POLE B - 4 FT. BEHIND BACK OF CURB

FUTURE RR SIGNAL AND GATE (TYP.) (APPROX. LOCATION)

Ø3

Vz31

TYPE I HD PULL BOX

RR TRACKS

FRONT ST.

TRAFFIC FLOW DIAGRAM

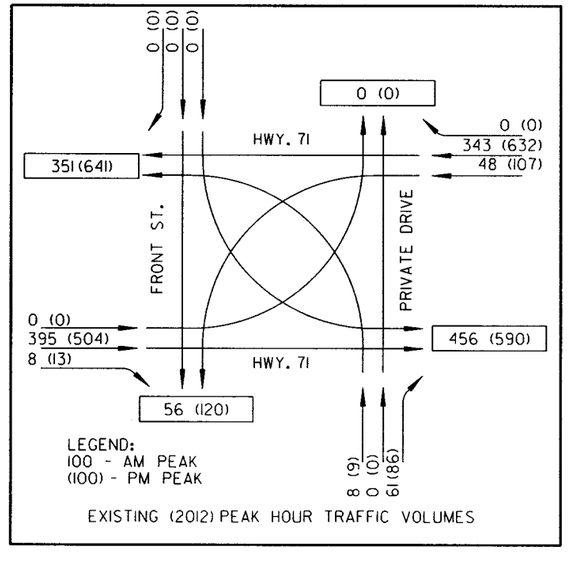

EXISTING (2012) PEAK HOUR TRAFFIC VOLUMES

SCALE IN FEET
0 10 20 40

DATE: 12/9/2016 FILE NAME: t030452.dgn

LOCATION:	HWY. 71/FRONT ST.		
CITY:	ASHDOWN		
COUNTY:	LITTLE RIVER		
DISTRICT:	3	SCALE: 1"=20'	DRAWN BY: CJS

T030452.DGN 12/9/2016

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		030452	12	23

(2) SIGNALIZATION PLAN SHEET

STATE OF ARKANSAS
REGISTERED PROFESSIONAL ENGINEER
No. 11425
TRINITY D. SMITH
12-12-16

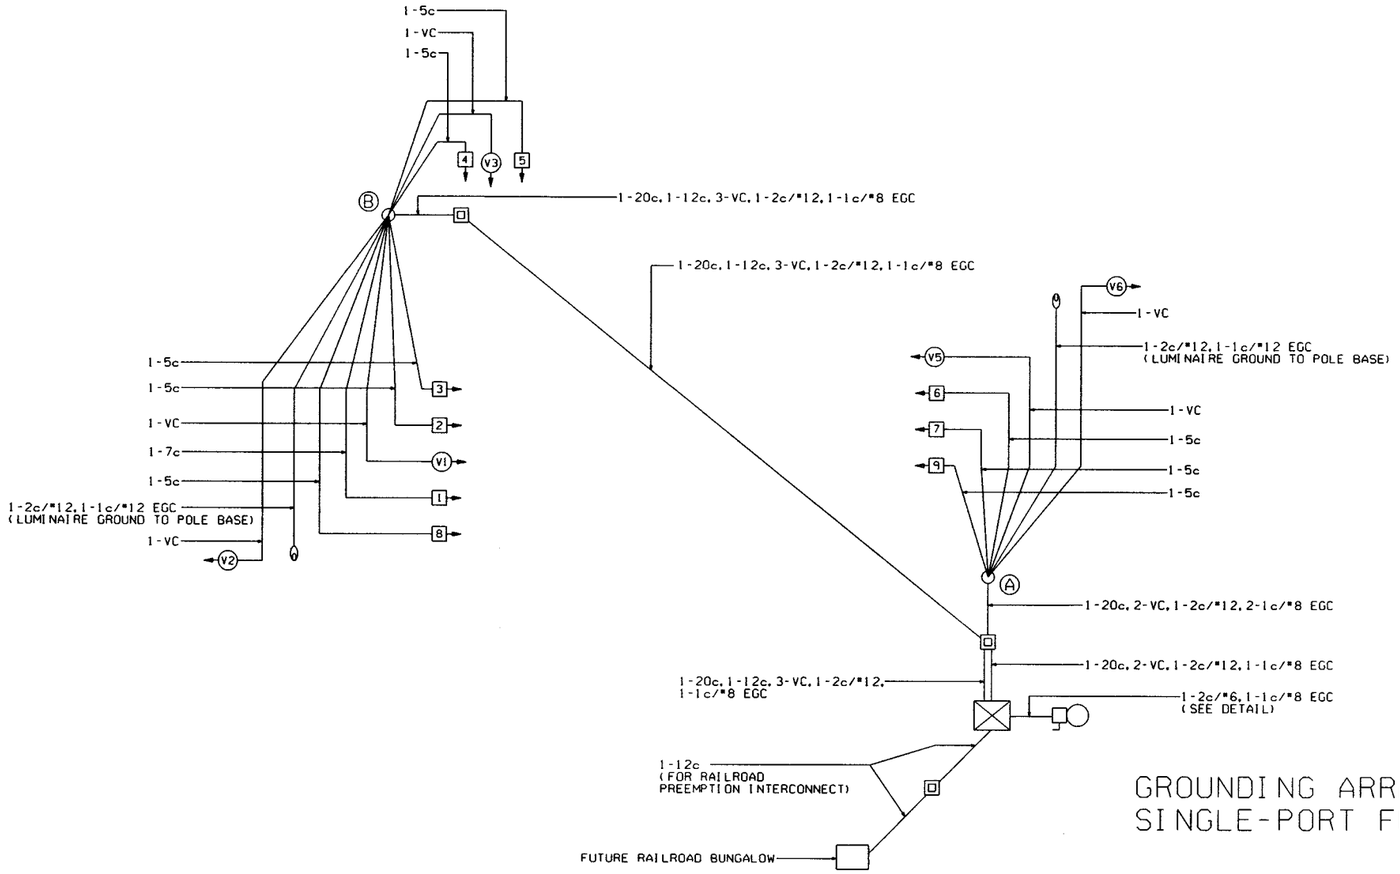

WIRING DIAGRAM

NOTES TO CONTRACTOR:

1. ALL DETECTOR RACK CHANNELS, INCLUDING UNUSED, SHALL BE BROUGHT TO TERMINAL STRIP IN DETECTOR AREA OF CABINET.
2. THE LOCAL GOVERNMENT SHALL BE RESPONSIBLE FOR PROVIDING POWER TO THE SERVICE POINT.

GROUNDING ARRAY
SINGLE-PORT FUSION WELDS

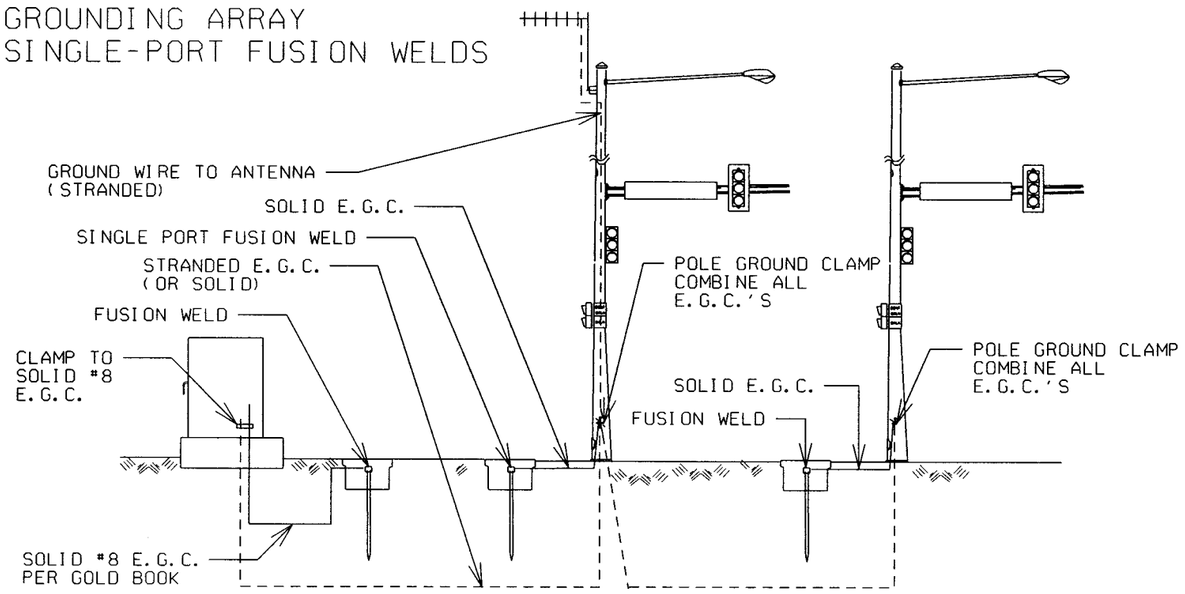

T030452.DGN 12/9/2016

DATE: 12/9/2016 FILE NAME: t030452.dgn

LOCATION:	HWY. 71/FRONT ST.				
CITY:	ASHDOWN				
COUNTY:	LITTLE RIVER				
DISTRICT:	3	SCALE:	N/A	DRAWN BY:	CJS

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED.RD. DIST.NO.	STATE	FED.AID PROJ.NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.		030452	13	23

(2) SIGNALIZATION PLAN SHEET

STATE OF ARKANSAS
REGISTERED PROFESSIONAL ENGINEER
No. 11425
TRINITY D. SMITH
12-12-16

DETECTOR SYSTEM DESCRIPTION: JOB 030452											
HWY. 71/FRONT ST. DETECTOR ASSIGNMENTS				HARDWARE INPUTS BY SUPPLIER			PROGRAM ASSIGNMENTS LOCAL		MASTER SYSTEM DETECTOR NUMBERS	COMMENTS	TUBE LENGTHS
DET. ID#	LOCATION DIRECTION	TYPE	DET. #	CAB. TRM #	AMP CHN. #	CON. INP.#	PHS	SYSTEM DET. #			
Vz11	NB LEFT TURN FAR	COMB.			1	V9	1	1		CAMERA V1	23'
Vz12	NB LEFT TURN NEAR	LOCAL			2	V1	1			CAMERA V1	23'
Vz21A&B	SB FAR	LOCAL			5	V2	2			CAMERA V2	74'
Vz22A&B	SB NEAR	COMB.			6	V10	2	2		CAMERA V5	23'
Vz31	EB NEAR PRESENCE	LOCAL			9	V3	3	3		CAMERA V3	23'
Vz61A&B	NB FAR	LOCAL			3	V6	6			CAMERA V6	74'
Vz62A&B	NB NEAR	COMB.			4	V14	6	6		CAMERA V1	23'
					SPARE AMP. CHN. #: 7,8,10-16						

CONTROLLER INPUT ABBREVIATIONS:
V = VEHICLE INPUT
D = SYSTEM OR AUXILIARY INPUT
P = PEDESTRIAN INPUT
NOTE: 'AMP CHN#' REFERS TO THE DETECTOR RACK OUTPUT POSITION. THIS IS WIRED TO CONTROLLER INPUT DETECTOR NUMBER WHICH IS PROGRAMMED TO ACTUATE THE DESIGNATED PHASE. EXAMPLE: V9 = SYSTEM DETECTOR 1, V10 = SYSTEM DETECTOR 2.

DETECTOR SPACING CHART

HWY. 71 MAIN LANE VIRTUAL VDZ		
POSTED SPEED	DISTANCE FROM STOP BAR	
	LEAD VDZ	LAG VDZ
40 MPH	230'	100'
HWY. 71 LEFT TURN LANE VIRTUAL VDZ		
POSTED SPEED	DISTANCE FROM STOP BAR	
	LEAD VDZ	LAG VDZ
40 MPH	65'	N/A

PHASING DIAGRAM

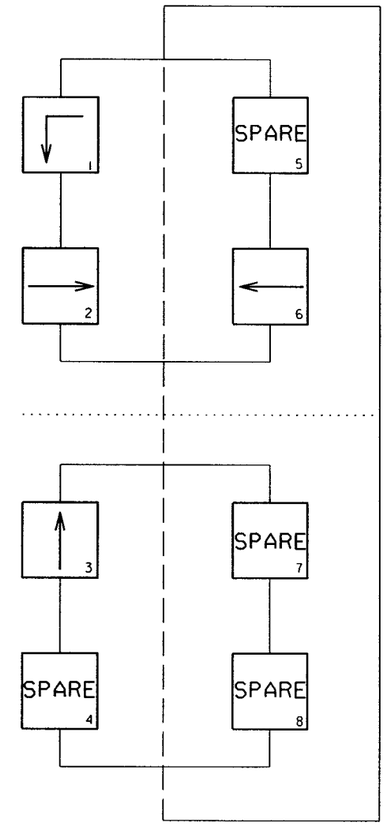

INTERVAL CHART

SIGNAL FACES	NORMAL CYCLE						RAILROAD PREEMPT						FLASH SEQ.
							CLEAR		DWELL				
	1+6	CLR.	2+6	CLR.	3	CLR.	3	CLR.	2+6	CLR.	RESUME NORMAL		
1	~~G~~	•	~~FY~~	•••	~~R~~	~~R~~	~~R~~	~~R~~	~~R~~	~~R~~			~~R~~
2&3	G	••	G	••	R	R	R	R	G	••			R
4	R	R	R	R	G	••	G	••	R	R			R
5	R	R	R	R	G	••	G	••	R	R			R
6&7	R	R	G	••	R	R	R	R	G	••			R
8	BLK	BLK	BLK	BLK	BLK	BLK	NLT	NLT	NLT	NLT			BLK
9	BLK	BLK	BLK	BLK	BLK	BLK	NRT	NRT	NRT	NRT			BLK

• DENOTES GREEN OR YELLOW ARROW DEPENDING ON NEXT PHASE
•• DENOTES GREEN OR YELLOW BALL DEPENDING ON NEXT PHASE
••• DENOTES FLASHING YELLOW ARROW OR YELLOW ARROW DEPENDING ON NEXT PHASE
NLT = NO LEFT TURN
NRT = NO RIGHT TURN
DWL = DWELL INTERVAL
FR = FLASHING RED
BLK = BLANK
W = STEADY WALK
FDW = FLASHING DONT WALK
DW = DONT WALK

FIBER OPTIC BLANK OUT SIGNS

FOR POLES A AND B

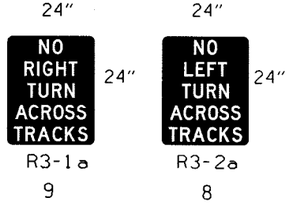

SIGNAL FACES

12" LENSES

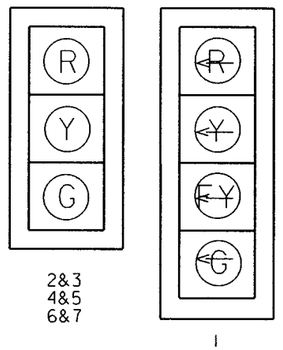

NOTES:
1. ALL SIGNAL HEADS SHALL HAVE BACKPLATES.

2. SIGNAL FACES 8 & 9 WILL ACTIVATE DURING RAILROAD PREEMPT CLEAR PHASE AND SHALL REMAIN ON THROUGHOUT THE RAILROAD PREEMPT DWELL PHASE.

T030452.DGN 12/9/2016

DATE: 12/9/2016 FILE NAME: t030452.dgn

LOCATION: HWY. 71/FRONT ST.
CITY: ASHDOWN
COUNTY: LITTLE RIVER
DISTRICT: 3 SCALE: N/A DRAWN BY: CJS

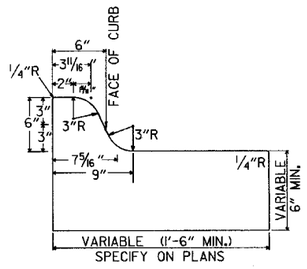

TYPE A

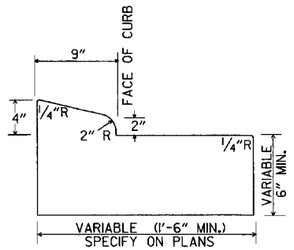

TYPE B-1

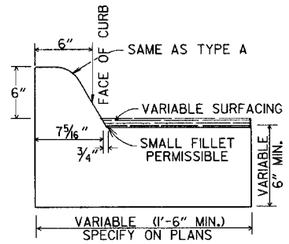

TYPE C

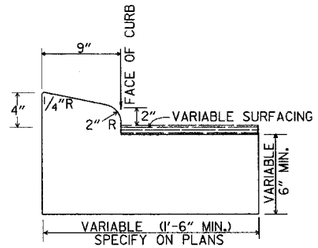

TYPE B-2

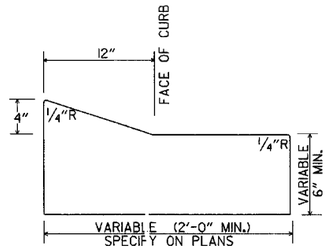

TYPE E-1

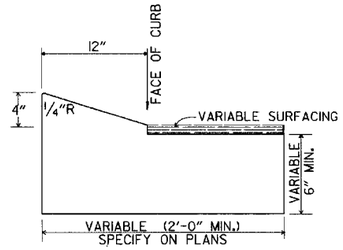

TYPE E-2

CONCRETE COMBINATION CURB AND GUTTER

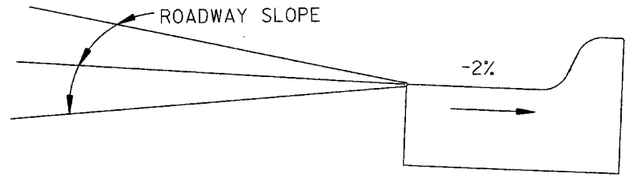

DETAIL OF GUTTER SLOPE

GUTTER SHALL BE CONSTRUCTED ON 2% SLOPE AWAY FROM ROADWAY, REGARDLESS OF ROADWAY SLOPE.

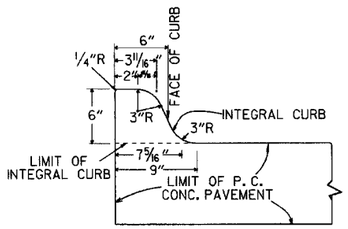

TYPE A

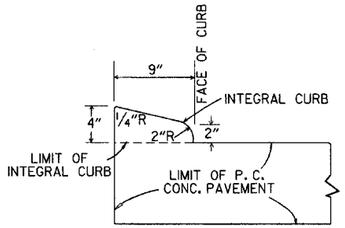

TYPE B

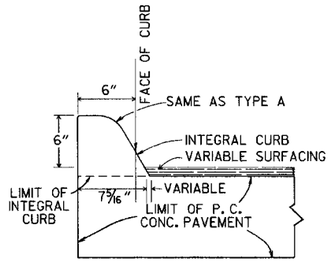

TYPE C

INTEGRAL CURB

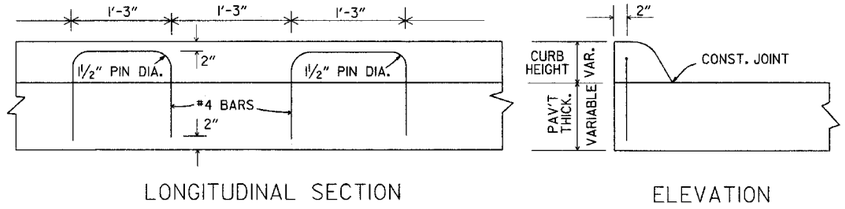

LONGITUDINAL SECTION

ELEVATION

ALTERNATE CONSTRUCTION METHOD FOR INTEGRAL CURB

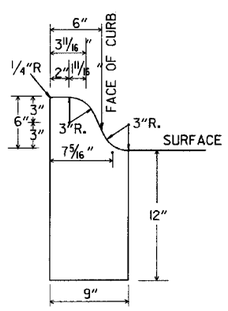

TYPE A

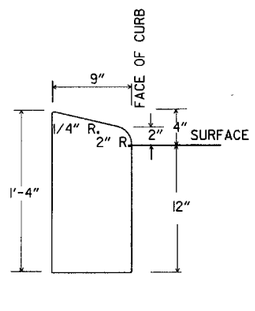

TYPE B

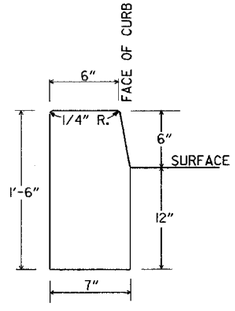

TYPE D

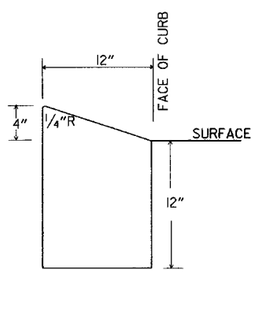

TYPE E

CONCRETE CURB

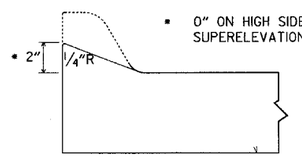

NOTE: USE MODIFIED CURB AS SPECIFIED ON STD. DR-1. COMPENSATION FOR MODIFIED CURB WILL BE CONSIDERED INCLUDED IN THE PRICE BID FOR THE TYPE OF CURB OR CURB AND GUTTER SPECIFIED.

DETAILS OF MODIFIED CURB

DATE	REVISION	DATE FILMED
11-29-07	REVISED GUTTER SLOPE & MODIFIED CURB DETAILS	
11-10-05	ADDED DETAILS OF TYPE E CURBS	
11-16-01	REVISED CONCRETE CURB TYPE B	
11-18-98	REVISED MODIFIED CURB	
6-2-94	ADDED NOTE TO SPECIAL MODIFIED CURB	
8-5-93	CORRECTED GUTTER SLOPE	8-5-93
10-1-92	ADDED DETAILS OF GUTTER SLOPE	10-1-92
5-24-90	ADDED DETAILS OF MODIFIED CURB	5-24-90
11-30-89	VARIBLE DEPTH TYPE A & B I	11-30-89
7-15-88	REVISED MODIFIED CURB	630-7-15-88
11-1-73	REVISED MODIFIED CURB	500-11-1-73
10-2-72	REVISED AND REDRAWN	512-10-2-72

ARKANSAS STATE HIGHWAY COMMISSION

CURBING DETAILS

STANDARD DRAWING CG-1

NOTES:
1. REFER TO THE STRIPING DETAILS FOR PAVEMENT MARKING LINE WIDTHS.
2. THIS DRAWING SHALL BE USED IN CONJUNCTION WITH THE LATEST REVISED ADDITION OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES."
3. RAISED PAVEMENT MARKERS SHALL BE PLACED ON AN 80 FEET SPACING UNLESS OTHERWISE SHOWN IN THE PLANS.

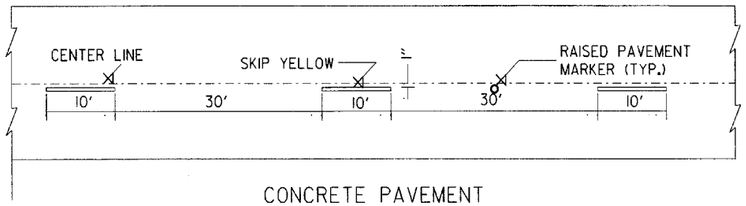

CONCRETE PAVEMENT

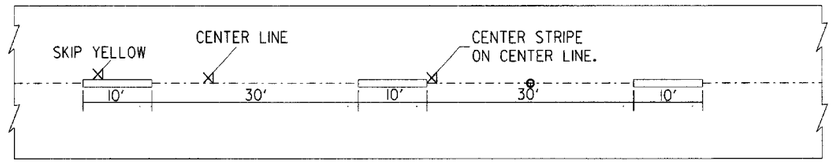

ASPHALT PAVEMENT

BROKEN LINE STRIPING

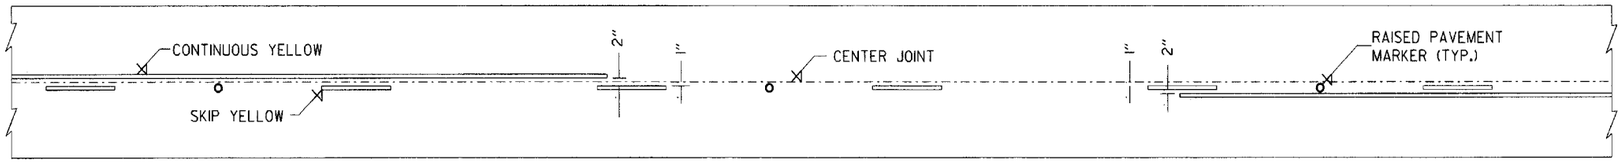

SOLID LINE STRIPING ON CONCRETE PAVEMENT

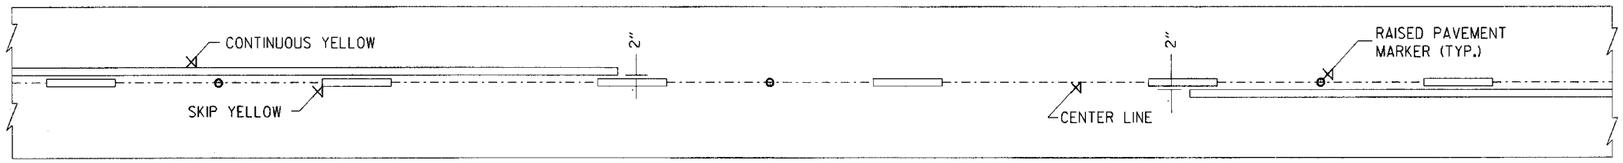

SOLID LINE STRIPING ON ASPHALT PAVEMENT

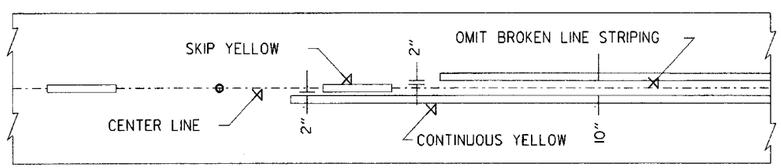

ASPHALT PAVEMENT

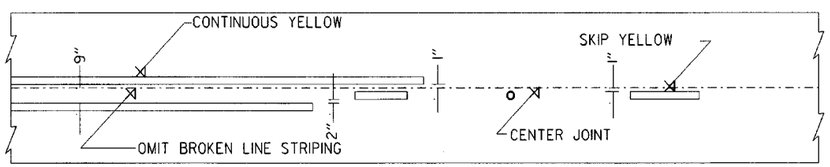

CONCRETE PAVEMENT

STRIPING AT ADJACENT NO PASSING LANES

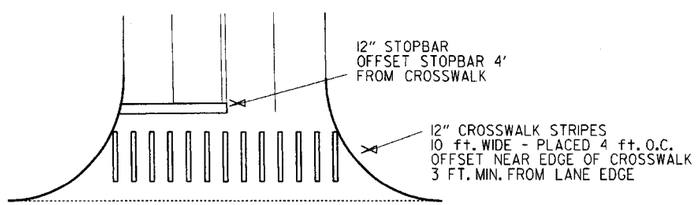

CROSSWALK AND STOPBAR DETAILS

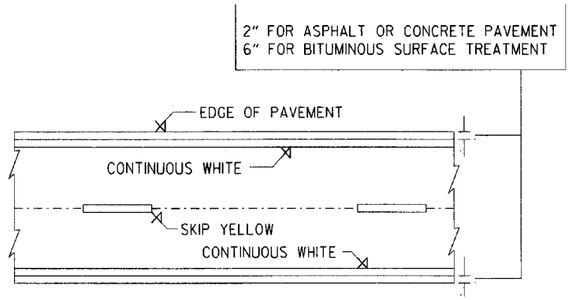

PAVEMENT EDGE LINE MARKING

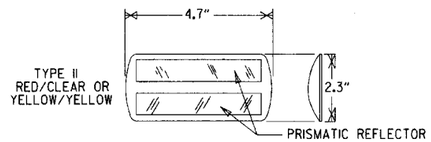

NOTE:
THE RED LENS OF THE TYPE II R.P.M. SHALL FACE THE INCORRECT TRAFFIC MOVEMENT.



DETAIL OF STANDARD RAISED PAVEMENT MARKERS

NOTE:
DIMENSIONS SHOWN FOR RAISED PAVEMENT MARKERS ARE TYPICAL. THE CONTRACTOR MAY SUBSTITUTE SIMILAR MARKERS WITH THE APPROVAL OF THE ENGINEER. REQUESTING APPROVAL FOR SIMILAR MARKERS MAY BE MADE BY REFERRING TO THE AHTD QUALIFIED PRODUCTS LIST.

DATE	REVISION	FILMED
5-12-16	REVISED LINE WIDTHS, SPACING, & NOTES	
9-12-13	REVISED DETAIL OF STANDARD RAISED PAVEMENT MARKERS	
11-17-10	REVISED GENERAL NOTES & REMOVED PLOWABLE PVMT MRKRS	
11-18-04	REVISED NOTE 2 & GENERAL NOTES	
8-22-02	ADDED CROSSWALK & STOPBAR DTLS.	
7-02-98	ADDED DETAILS OF STD. RAISED PAV'T. MARKERS	
4-26-96	REV. NOTES 3&4; ADDED R.P.M.	
9-30-80	DRAWN	1-9-30-80

ARKANSAS STATE HIGHWAY COMMISSION

PAVEMENT MARKING DETAILS

STANDARD DRAWING PM-1

DRAWER PLAN VIEW

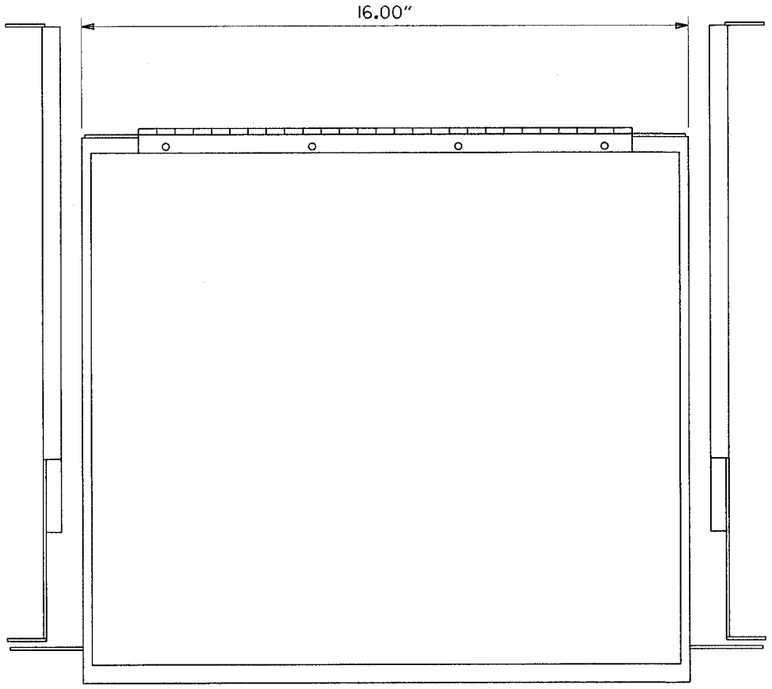

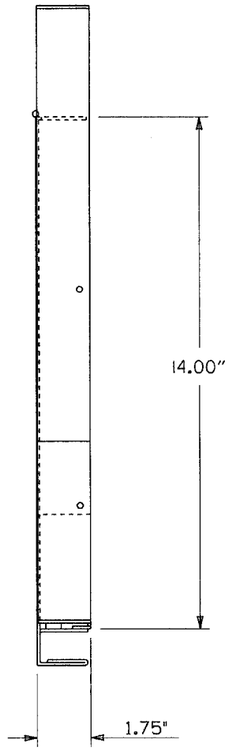

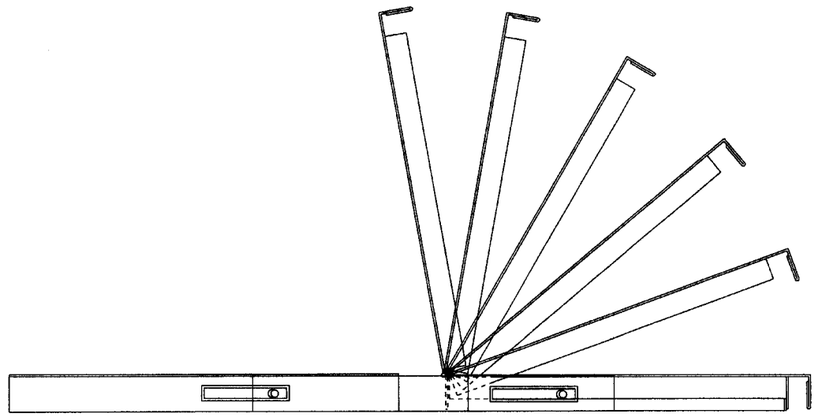

NOTES:
1. RIGHT HAND SLIDE SHOWN, LEFT SLIDE OPPOSITE.
2. GENERAL DEVICES (CC3002-99-0102) OR EQUAL AND CONTAINS (1) RIGHT HAND SLIDE ASSEMBLY, (1) LEFT HAND SLIDE ASSEMBLY.
3. ALL HARDWARE NECESSARY TO FASTEN SLIDE ASSEMBLY TO UNDERSIDE OF CONTROLLER SHELF SHALL BE INCLUDED.



FRONT VIEW

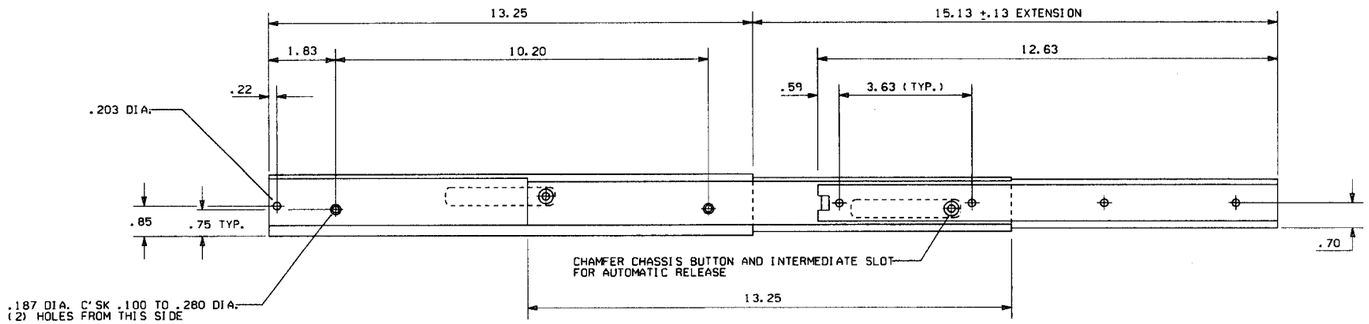

RIGHT SIDE ASSEMBLY

DATE	REVISION	DATE FILM
9-12-13	ISSUED AS STANDARD DRAWING	
6-15-05	ISSUED	

ARKANSAS STATE HIGHWAY COMMISSION

CONTROLLER CABINET
UTILITY DRAWER

STANDARD DRAWING SD-5

CONDUIT ENTRY TO EXISTING POLE BASE

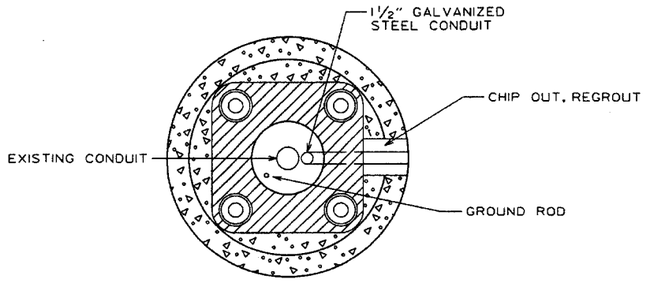

ANCHOR BASE

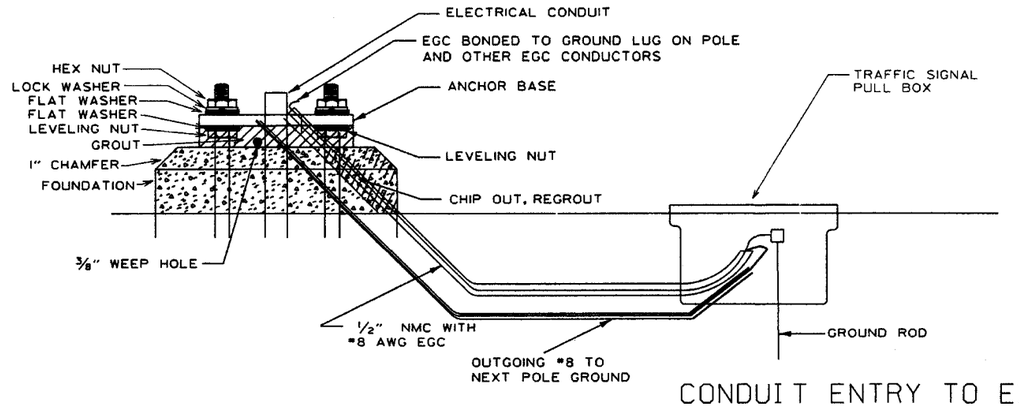

CONDUIT ENTRY TO EXISTING CONTROLLER CABINET

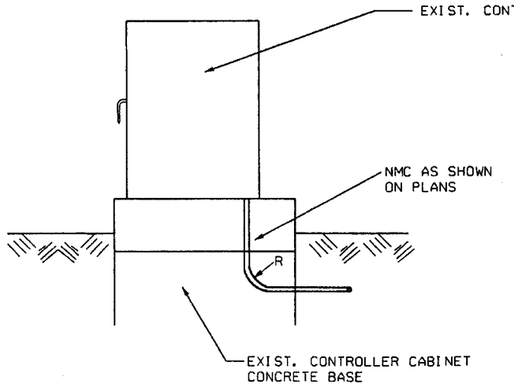

NOTE: ENTRY TO CABINET SHALL BE THROUGH A CUT IN THE BASE SUFFICIENT TO PROVIDE ADEQUATE CONDUIT RADIUS FOR ITEM.

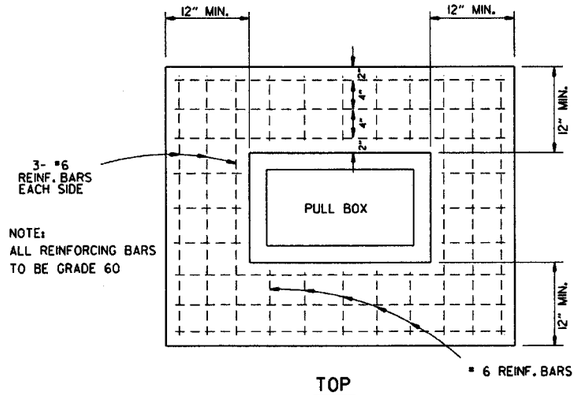

TOP

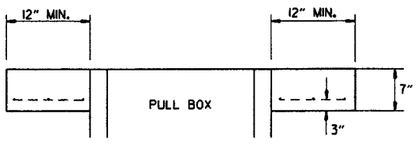

ELEVATION

TYPE "HD" CONCRETE PULL BOX DETAIL

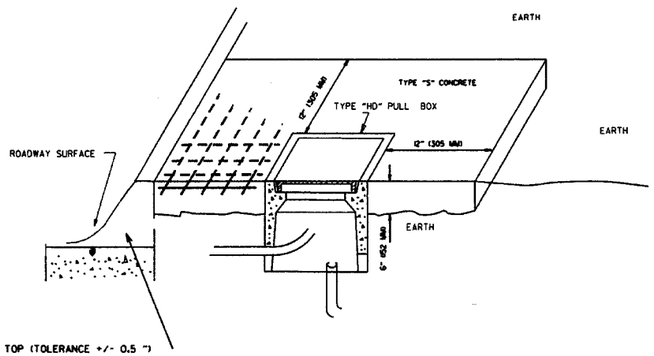

NOTE: ALL TYPE 1 AND TYPE 2 HD PULL BOXES ARE INSTALLED WITH AN APRON OF CONCRETE 12" (305 MM) WIDE AND 7" (178 MM) IN DEPTH. ALL PAYMENT SHALL BE INCLUDED IN THE PRICE OF THE TYPE HD PULL BOX. PULL BOX SHALL BE INSTALLED FLUSH TO SURROUNDING GRADE UNLESS OTHERWISE INSTRUCTED BY THE ENGINEER. THE CONCRETE SHALL BE CLASS "S." THREE #6 REINFORCING BARS IN THE APRON ON ALL SIDES OF THE PULL BOX IS REQUIRED IN CONCRETE.

DATE	REVISION	DATE FILM
9-2-15	REVISED PULL BOX DEPTH	
9-12-13	ISSUED AS STANDARD DRAWING	
5-21-09	REVISED GROUNDING	
7-31-08	ADDED & REVISED CONDUIT ENTRY	
6-23-04	REVISED CLEARANCE AT CURB ENTRY	
1-4-02	ADDED REINFORCING TO BOX APRON	
7-2-01	REVISED	
12-27-99	REVISED NOTES	
11-18-98	ISSUED	

ARKANSAS STATE HIGHWAY COMMISSION

HEAVY DUTY PULL BOX

STANDARD DRAWING SD-6

(A)

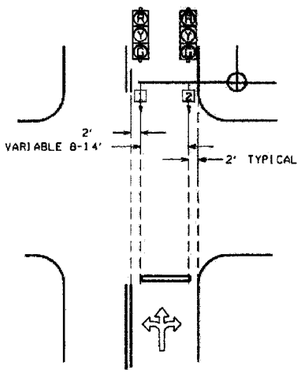

(B)

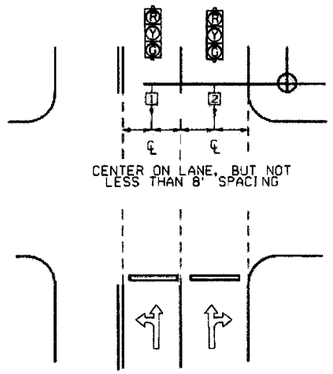

(C)

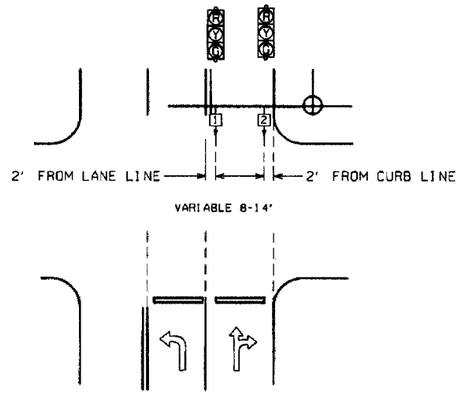

(C2)

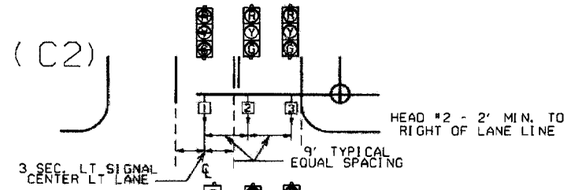

(C1)

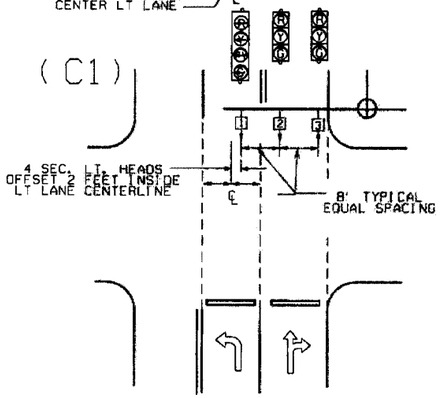

(C3)

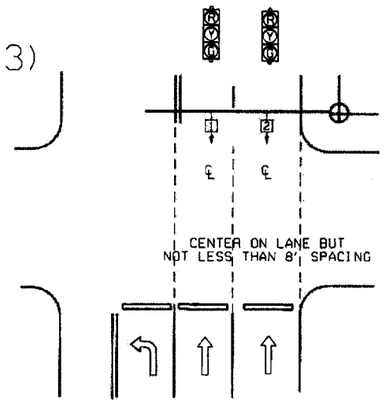

(D2)

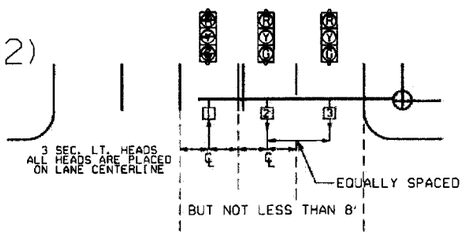

(D1)

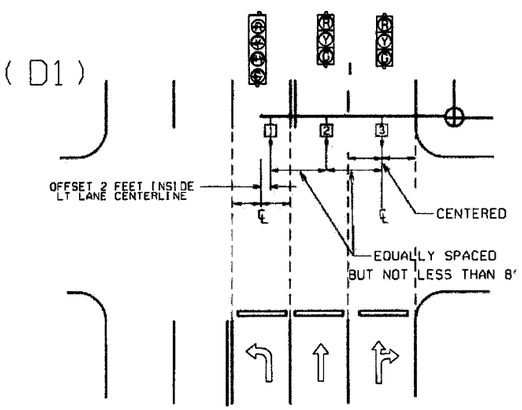

NOTE: WHERE LEFT TURN HEAD (HEAD 1 ON D1 AND D2) IS NOT CALLED FOR ON PLANS, MAST ARM LENGTH MAY STILL BE ALLOWED FOR FUTURE INSTALLATION. HEADS FOR THROUGH MOVEMENTS SHALL STILL BE ALIGNED WITH THROUGH LANES AS SHOWN ON DETAILS.

(E)

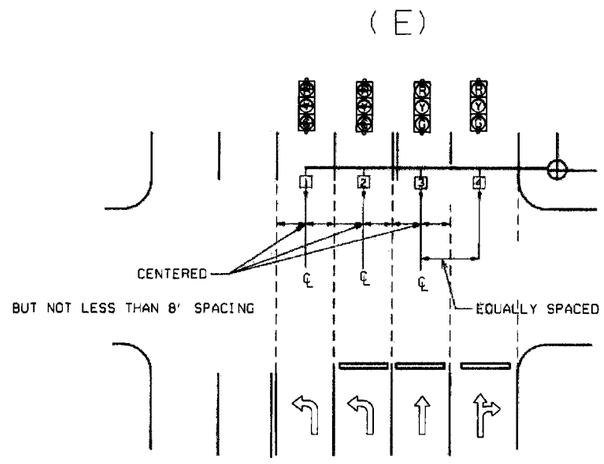

℄ = CENTER OF LANE FROM APPROACH SIDE

GENERAL NOTES:

1. FOUR SECTION "PROTECTED/PERMISSIVE" LEFT TURN HEADS SHOULD BE PLACED A MINIMUM OF TWO (2') FEET TO THE RIGHT OF THE CENTERLINE OF THE APPROACHING LEFT TURN LANE.

2. THREE SECTION "PROTECTED" LEFT TURN HEADS SHOULD BE PLACED ON THE CENTERLINE OF THE APPROACHING LEFT TURN LANE.

3. WHEN IT IS NECESSARY TO PLACE POLES OTHER THAN AS SHOWN ON PLAN SHEET(S) RESULTING IN MAST ARM EXTENDING MORE THAN TWO FEET PAST (TO THE LEFT OF) THE CENTERLINE OF THE APPROACHING LEFT TURN LANE, MAST ARM SHALL BE CUT TO APPROPRIATE LENGTH AS DETERMINED BY THE ENGINEER, AND A NEW END CAP PROVIDED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING THIS PRIOR TO INSTALLING THE MAST ARM IF ADDITIONAL COMPENSATION IS REQUIRED.

4. SIGNAL HEAD SPACING SHALL, IN NO CASE, BE LESS THAN EIGHT (8') FEET BETWEEN HEADS ON CENTER, MEASURED HORIZONTALLY PERPENDICULAR TO THE APPROACH.

5. ALL SIGNAL HEADS SHOWN ON THIS DETAIL SHEET SHALL BE LOCATED ACCORDING TO THE DIMENSIONS SHOWN IN RELATION TO THE APPROACH SIDE OF THE INTERSECTION.

6. MAXIMUM MOUNTING HEIGHT OF SIGNAL FACES LOCATED BETWEEN 40 FEET AND 53 FEET FROM STOP BAR SHALL BE IN ACCORDANCE WITH FIGURE 4D-5 OF 2009 MUTCD.

DATE	REVISION	DATE FILM
12-8-16	REVISED NOTE 6	
9-12-13	ISSUED AS STANDARD DRAWING	
3-11-10	2009 MUTCD	
12-9-99	ISSUED	

ARKANSAS STATE HIGHWAY COMMISSION

SIGNAL HEAD PLACEMENT

STANDARD DRAWING SD-8

MAIN BREAKER NOT NEAR CONTROLLER CABINET SECONDARY REQUIRED

WITH POWER ISOLATION ASSEMBLY

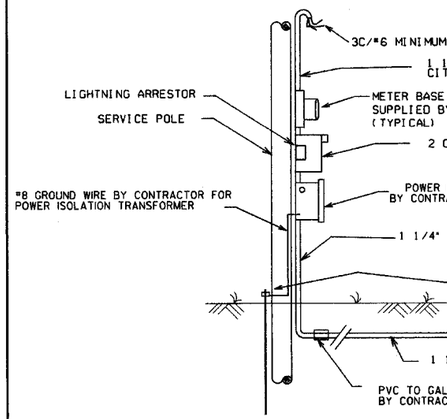

WITHOUT POWER ISOLATION ASSEMBLY

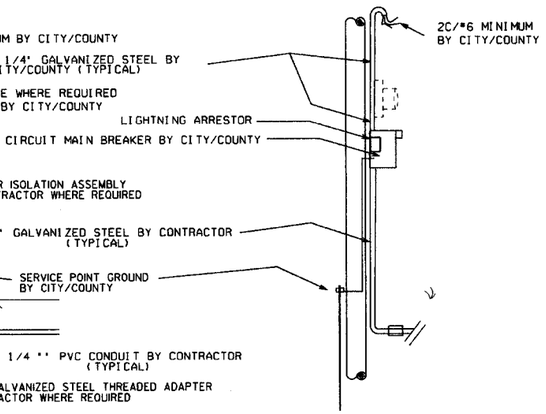

GROUND ROD-A 10' X ⅝" GROUND ROD SHALL BE INSTALLED IN THE PULL BOX FOR EACH POLE AND THE CONTROLLER. PAYMENT FOR THE GROUND ROD AND ½" NMC SHALL BE INCLUDED IN ITEM 701. THE PULL BOX AND CONDUCTOR BOX SHALL BE PAID FOR SEPARATELY.

SECONDARY BREAKER BY CONTRACTOR (SUBSIDIARY)

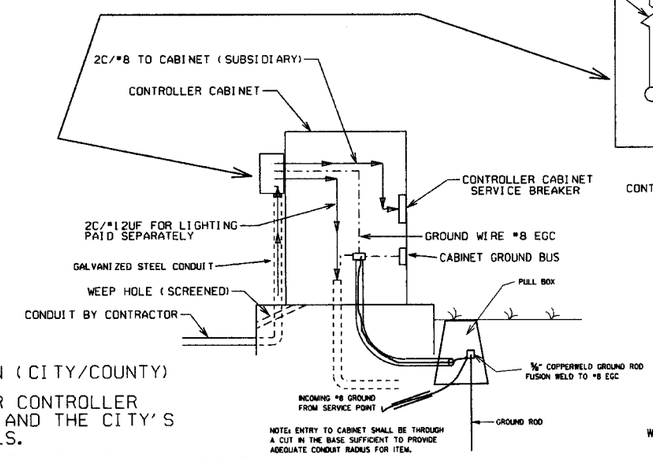

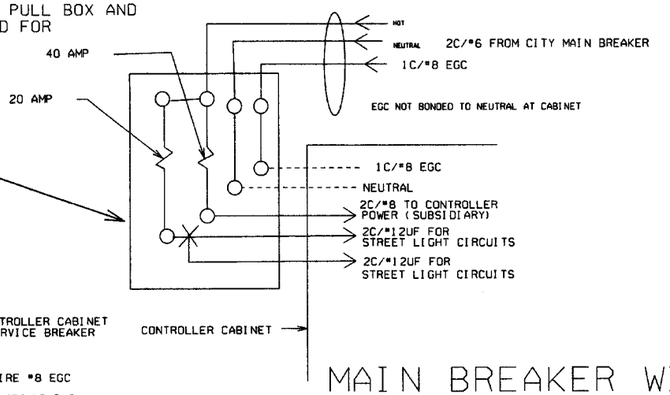

MAIN BREAKER WIRING (TYPICAL)

NOTES TO CONTRACTOR AND AGENCY RESPONSIBLE FOR MAINTENANCE OF THE INTERSECTION (CITY/COUNTY)

ELECTRICAL SERVICE TYPICALLY FALLS INTO TWO CATEGORIES: MAIN BREAKER NEAR CONTROLLER CABINET; AND MAIN BREAKER NOT NEAR CONTROLLER CABINET. THE CONTRACTOR'S AND THE CITY'S OR COUNTY'S RESPONSIBILITY VARIES ACCORDINGLY AS INDICATED ON THESE DETAILS.

1. ALL SITUATIONS: ELECTRICAL SERVICE SHALL BE PROVIDED BY THE CITY/COUNTY TO A SERVICE POLE WITH EXTERNAL RAINTIGHT BREAKER (MAIN BREAKER) AT A MUTUALLY ACCEPTABLE POINT WITHIN THE RIGHT-OF-WAY. SERVICE POINT INCLUDES GALVANIZED STEEL CONDUIT TO A POINT 18" BELOW GROUND LINE, TWO CIRCUIT MAIN BREAKER, LIGHTNING ARRESTOR, POWER ISOLATION ASSEMBLY WHERE REQUIRED, METER LOOP IF REQUIRED BY LOCAL UTILITY, ELECTRICAL CONDUCTORS AND WEATHERHEAD. WHERE STREET LIGHTING IS INCLUDED AS PART OF SIGNAL INSTALLATION, STREET LIGHTING CIRCUIT (2C/#12 AWG UF RATED, TYPICAL) SHALL BE KEPT SEPARATE FROM THE CIRCUIT SERVING TRAFFIC SIGNAL. SERVICE WIRE AND WIRING FROM THE CONTROLLER TO MAIN BREAKER IS PROVIDED BY THE CONTRACTOR AS A PART OF THIS CONTRACT. WIRE AND WIRING FROM MAIN BREAKER, AND CONNECTION TO THE UTILITY IS THE RESPONSIBILITY OF THE CITY/COUNTY.

2. MAIN BREAKER NOT NEAR CONTROLLER CABINET: THE MAIN BREAKER ASSEMBLY, GALVANIZED STEEL CONDUIT, WEATHERHEAD AND WIRE ABOVE MAIN BREAKER AND CONNECTION TO THE UTILITY SHALL BE PROVIDED BY CITY/COUNTY. CONTRACTOR SHALL PROVIDE AS PART OF CONTRACT SECONDARY BREAKER, CONDUIT, WIRE AND WIRING TO THE MAIN BREAKER.

3. MAIN BREAKER NEAR CONTROLLER CABINET: ALL COMPONENTS OF THE SERVICE POINT WITH THE EXCEPTION OF THE WIRE AND WIRING ABOVE THE MAIN BREAKER IS FURNISHED AND INSTALLED BY THE CONTRACTOR. WIRING FROM MAIN BREAKER INCLUDING CONNECTION TO THE UTILITY, IS THE RESPONSIBILITY OF THE CITY/COUNTY. IF METER LOOP IS REQUIRED, METER BASE AND HARDWARE IS PROVIDED BY THE CITY/COUNTY AND INSTALLED BY THE CONTRACTOR.

SERVICE GROUND IS TYPICALLY TIED TO NEUTRAL AT THE MAIN BREAKER. AS SUCH, CONTROLLER GROUND IS NOT TIED TO NEUTRAL AT SECONDARY BREAKER OR IN CONTROLLER CABINET.

WITH POWER ISOLATION ASSEMBLY
4 CIRCUIT MAIN BREAKER

WITHOUT POWER ISOLATION ASSEMBLY
2 CIRCUIT MAIN BREAKER

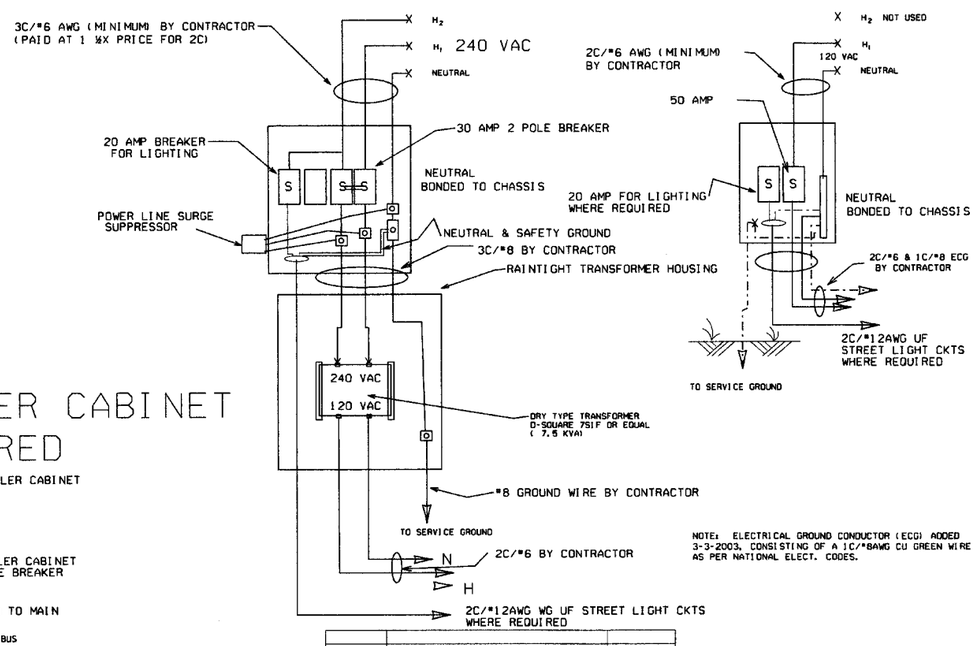

NOTE: ELECTRICAL GROUND CONDUCTOR (EGG) ADDED 3-3-2003, CONSISTING OF A 1C/#8AWG CU GREEN WIRE AS PER NATIONAL ELECT. CODES.

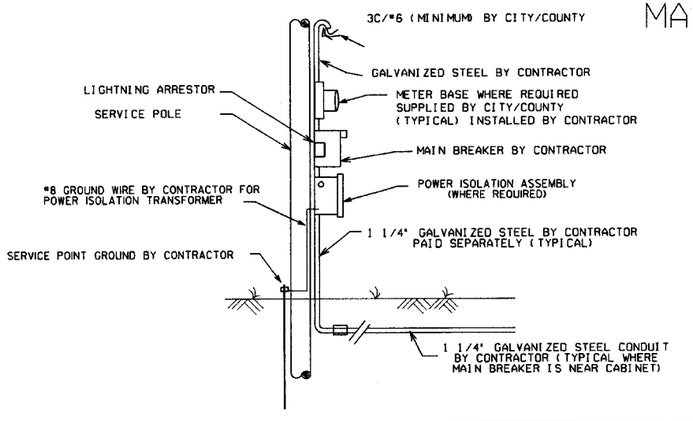

MAIN BREAKER NEAR CONTROLLER CABINET SECONDARY NOT REQUIRED

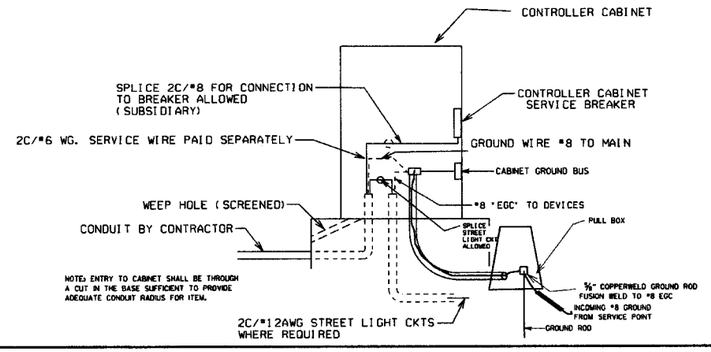

DATE	REVISION	DATE FILM
9-12-13	ISSUED AS STANDARD DRAWING	
4-18-13	ADDED LIGHTNING ARRESTOR	
5-21-09	REVISED GROUNDING	
7-31-08	REVISED GROUNDING	
3-3-03	ADDED EGC NOTE	
9-26-01	REVISED	
12-27-99	REVISED	
7-28-99	REVISED	
2-5-99	ISSUED	

ARKANSAS STATE HIGHWAY COMMISSION

SERVICE POINT

STANDARD DRAWING SD-9

NOTES, PED AND TRAFFIC SIGNAL HEAD SIGNS:
EACH ITEM "TRAFFIC SIGNAL HEAD (4 SEC., 1-WAY)" SHALL INCLUDE A SPECIAL SIGN AS SHOWN, ATTACHED TO THE MAST ARM OR SPAN ASSEMBLY 12' TO THE RIGHT OF THE SIGNAL HEAD UNLESS REMOVED WITHIN THE SIGNAL PLAN NOTES.

EACH ITEM "TRAFFIC SIGNAL HEAD (3 SEC., 1-WAY)" TO BE USED AS A LEFT TURN INDICATION ONLY SHALL INCLUDE A SIGN (R10-10) AS SHOWN, ATTACHED TO THE MAST ARM OR SPAN ASSEMBLY 12' TO THE RIGHT OF THE SIGNAL HEAD.

EACH PEDESTRIAN PUSHBUTTON SHALL HAVE ONE R10-3E SIGN ATTACHED TO THE POLE ABOVE THE BUTTON. ALL SIGNS SHALL BE MANUFACTURED IN ACCORDANCE WITH SECTION 723 OF THE STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION.

ALL SIGN BLANKS SHALL BE CONSTRUCTED OF ALUMINUM ALLOY (ASTM DESIGNATION B-209. ALLOY 5052-H38) WITH THICKNESS OF 0.100 INCH.

GENERAL NOTES:
1. MAST ARM POLES SHALL BE MOUNTED A MINIMUM OF 4 FT. BEHIND CURB OR SHOULDER.

2. OCTAGONAL POLES AND ARMS MEETING THE REQUIREMENTS OF THE PLANS AND SPECIFICATIONS CAN BE INSTALLED IN LIEU OF ROUND. ALL POLES AND ARMS IN A JOB MUST BE THE SAME SHAPE.

3. MINIMUM STRUCTURAL REQUIREMENTS:
DESIGN SPECIFICATIONS: AASHTO STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES AND TRAFFIC SIGNALS, 4TH EDITION (2001) WITH 2003 AND 2006 INTERIMS.

USE FATIGUE CATEGORY I FOR ALL STRUCTURES ON ROUTES WHERE THE SPEED LIMIT IS 65 MPH AND GREATER AT THE STRUCTURE LOCATION AND ON ROUTES WHERE SPEED LIMIT IS GREATER THAN 45 MPH WITH AN ARM 60' OR LONGER.

USE FATIGUE CATEGORY II FOR STRUCTURES ON ROUTES WITH A SPEED LIMIT LESS THAN 65 MPH AND GREATER THAN 45 MPH WITH ARMS LESS THAN 60' AND ROUTES WITH SPEED LIMITS OF 45 MPH AND LESS WITH AN ARM 60' OR LONGER.

USE FATIGUE CATEGORY III FOR ALL STRUCTURES WHERE SPEED LIMIT IS 45 MPH AND LESS AND ARMS LESS THAN 60'.

CONSTRUCTION SPECIFICATIONS: ARKANSAS STATE HIGHWAY AND TRANSPORTATION DEPARTMENT STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION (CURRENT EDITION) WITH APPLICABLE SUPPLEMENTAL SPECIFICATIONS AND SPECIAL PROVISIONS.

BASE WIND SPEED: 90 MPH.

STEEL MEMBERS CONSIDERED MAIN LOAD CARRYING MEMBERS WITH A THICKNESS GREATER THAN 1/2" SHALL MEET THE LONGITUDINAL CHARPY V-NOTCH TEST SPECIFIED IN SUBSECTION 807.05 OF THE STANDARD SPECIFICATIONS.

DEAD LOAD: AS A MINIMUM, DESIGN SHALL BE BASED ON THE FIXED ATTACHMENTS SHOWN BELOW OR AS MODIFIED IN THE PLANS.

ALL SIGNAL HEADS TO BE ONE WAY, 12 INCH, AND HAVE 5 IN. BACK PLATES.

HEADS AT END OF ARM - ONE 4 SEC., 85 LB., 16.0 SQ. FT. ONE SIGN MOUNTED 3 FT. FROM SIGNAL = 2' X 0' X 2' = 6', 20 LB. REMAINING HEADS SPACED A 8 FT. = 3 SEC., 56 LB., TWO 5 SEC):
14.4 SQ. FT. DESIGN TO ACCOMMODATE (INCLUDING
2 HEADS FOR ARMS 10 TO 16 FT.
2 HEADS FOR ARMS 10 TO 16 FT., INCLUDING LB.
3 HEADS FOR 18 TO 24 FT. ARMS;
4 HEADS FOR OVER 26 FT. ARMS.

STREET NAME SIGN -- 72" X 18", MOUNTED SUCH THAT OUTSIDE EDGE IS NOT GREATER THAN 12 FT. FROM POLE. DEPENDING UPON POSITION OF SIGNAL HEAD ADJACENT TO POLE, SIGN MAY OVERLAP POLE SHAFT
ROADWAY LUMINAIRES (WHERE REQUIRED ON PLAN SHEET) = VARIABLE ARM LENGTH (MAX.), 3.3 SQ. FT., 75 LB. PED SIGNALS -- TWO 2 SEC. 12 INCH MOUNTED 8 FT. FROM BASE OF POLE,
POST MOUNTED 3 SEC. SIGNAL HEAD AT 10 FT. ON SIDE OF POLE.

4. POLE/MAST ARM CAP -- POLE AND MAST ARMS CAPS SHALL BE PROVIDED, FABRICATED OF EITHER STEEL OR CAST ALUMINUM.

5. HAND HOLE -- HAND HOLES SHALL BE 4 X 6 INCHES FOR STANDARD, AND 3 X 5 INCHES FOR PED POLES. MINIMUM PLACED APPROXIMATELY 12 INCHES FROM BASE, AND SHALL BE FIXED WITH A BOLT DOWN COVER. A VACUUM FORMED ABS COVER IS AN ACCEPTABLE ALTERNATE TO STEEL. POLES GREATER THAN 21 FT. IN HEIGHT (FOR ROADWAY LUMINAIRE ATTACHMENT) SHALL INCLUDE A HAND HOLD WITHIN 12 INCHES OF MAST ARM(S) ATTACHMENT(S).

6. POLE/MAST ARM TAPER AND SLOPE - AVERAGE TAPER OF SIGNAL ARMS AND POLE SHALL BE 0.125 TO 0.15 INCHES PER FT.

MAST ARM CENTERLINE ANGLE AT ATTACHMENT POINT WITH POLE SHALL MAINTAIN NOT LESS THAN 0.5 DEGREES OR MORE THAN 4 DEGREES POSITIVE SLOPE WITH A LINE PERPENDICULAR TO THE POLE CENTERLINE. THE ARM SHALL MAINTAIN A POSITIVE AFTER IT IS PLACED UNDER LOAD.

7. NUT COVERS - EACH POLE SHALL INCLUDE A BOLT DOWN NUT COVER FOR EACH ANCHOR BOLT.

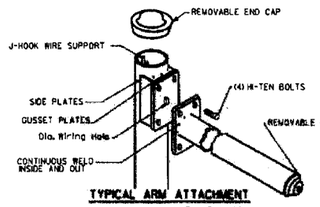

TYPICAL ARM ATTACHMENT



NOTE: THE SIGNAL SHALL BE CONNECTED TO THE MAST ARM BY BRACKETING AS DIRECTED BY THE ENGINEER.

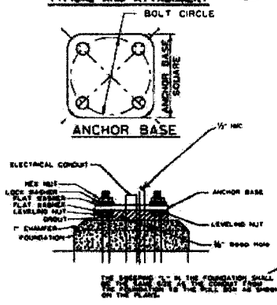

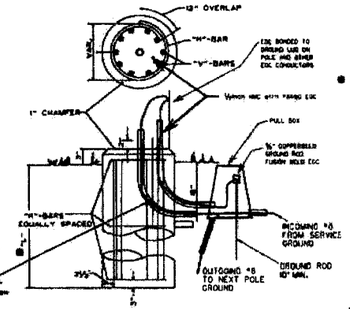

THE GROUND ROD SHALL BE FUSION WELDED TO A 1C/#8 A.W.G. SOLID COPPER GROUND WIRE. ATTACHMENT TO THE PRIMARY GROUND MAY BE BY AN APPROVED CLAMP. THE ROD IS TO BE LOCATED IN THE CONCRETE PULL BOX.

TYPICAL FOUNDATION DETAILS

POLE FOUNDATION MINIMUM DIMENSIONS AND STEEL REINFORCING. ALL REINFORCING STEEL SHALL BE GRADE 40 MIN.

ARM LENGTH	FDN. DIAMETER	DEPTH "L" ●	STEEL VERT.	STEEL HORZ.	STEEL O/C.
PED	30"	7'-0"	12-#7 (6'-6")	10-#4	8.44"
2' to 12'	30"	10'-6"	12-#7 (10'-0")	15-#4	8.42"
over 12' to 20'	30"	11'-6"	12-#7 (11'-0")	16-#4	8.66"
over 20' to 35'	36"	12'-6"	13-#8 (12'-0")	17-#4	8.88"
over 35' to 50'	36"	13'-6"	13-#8 (13'-0")	19-#4	8.56"
over 50' to 72'	42"	14'-6"	18-#8 (14'-0")	20-#4	8.74"
Twins to 20'	30"	16'-0"	12-#6 (15'-6")	22-#4	8.76"
Twins over 20' to 44'	36"	16'-0"	13-#8 (15'-6")	22-#4	8.76"
Twins over 44' to 50'	42"	16'-0"	18-#8 (15'-6")	22-#4	8.76"
Twins over 50' to 72'	42"	16'-6"	18-#8 (16'-0")	23-#4	8.64"

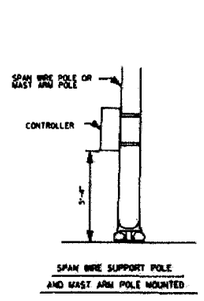

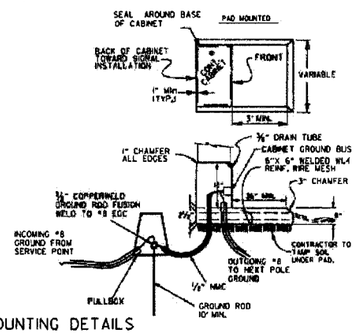

CONTROLLER CABINET MOUNTING DETAILS

UNLESS OTHERWISE DIRECTED BY THE ENGINEER, CABINET ORIENTATION SHALL BE SUCH THAT THE BACK OF THE CABINET IS PARALLEL TO THE STREET AND POSITIONED TO ALLOW VISIBILITY OF THE SIGNAL DISPLAY WHILE OBSERVING THE CONTROLLER FRONT PANEL.

8. GROUND ROD - A 10' X 5/8" GROUND ROD SHALL BE INSTALLED IN THE PULL BOX FOR EACH POLE AND THE CONTROLLER. PAYMENT FOR THE GROUND ROD AND 1/2" NMC SHALL BE INCLUDED IN ITEM 714 FOR SIGNAL POLES AND ITEM 701 FOR THE CONTROLLER. THE PULL BOX AND CONDUCTOR BOX SHALL BE PAID FOR SEPARATELY.

9. POLE BASE/FOUNDATION - ANCHOR BOLTS SHALL INCLUDE AS A MINIMUM, ONE LEVELING NUT, TWO FLAT WASHERS, ONE LOCK WASHER, AND ONE HEX. NUT. PERIMETER OF ANCHOR BASE SHALL BE GROUTED WITH A 1/4" WEEP HOLE. ALL CONCRETE SHALL BE CLASS "S" OR GREATER.

10. CONCRETE - ALL CONCRETE FOR CONTROLLER CABINET AND POLE FOUNDATIONS SHALL BE CLASS "S" OR GREATER.

11. PEDESTRIAN PHASES - PEDESTRIAN MOVEMENTS SHALL BE PUSH BUTTON ACTUATED AND CONCURRENTLY TIMED, UNLESS OTHERWISE INDICATED ON THE PLAN SHEET(S). FURNISHING AND INSTALLING PED PUSH SWITCH SHALL BE CONSIDERED SUBSIDIARY TO THE ITEM PEDESTRIAN SIGNAL HEAD.

SIGNAL OPERATION NOTES:

FLASHING OPERATION - PRIOR TO NORMAL OPERATION, SIGNAL SHALL BE FLASHED FOR A PERIOD OF 3 TO 5 WORK DAYS, OR AS DIRECTED BY THE ENGINEER. SIGNAL SHALL BE PLACED IN OPERATION ONLY ON A REGULAR WORK DAY, EXCEPT FRIDAY.

THE CONTRACTOR MAY BE REQUIRED TO ALTER THE FLASHING DISPLAY DURING THE TEMPORARY FLASH PERIOD. AT THE TIME INTERSECTION IS PLACED IN PERMANENT OPERATION, THE FLASH SEQUENCE SHALL THEN BE RETURNED TO THAT INDICATED ON THE PLAN SHEETS. NO ADDITIONAL COMPENSATION SHALL BE ALLOWED FOR THESE ALTERATIONS IN FLASH SEQUENCE.

SPECIAL NOTE: 90 MPH WIND ZONE DESIGN, SEE NOTE 3. MINIMUM STRUCTURAL REQUIREMENTS.

● WHEN THE GROUND ELEVATION AT THE POLE IS LOWER THAN THE ROADWAY ELEVATION, THE LENGTH OF FOUNDATION ABOVE THE GROUND MAY BE INCREASED TO PROVIDE THE REQUIRED SIGNAL HEAD CLEARANCE ABOVE THE ROADWAY. WHEN THE REQUIRED LENGTH OF FOUNDATION ABOVE THE GROUND IS 18" OR LESS, NO INCREASE IN DEPTH "L" WILL BE REQUIRED. WHEN THE REQUIRED LENGTH OF FOUNDATION ABOVE THE GROUND IS 5'-6" OR LESS, INCREASE DEPTH "L" BY 1'-0". FOR LENGTHS GREATER THAN 5'-6", DEPTH "L" SHALL BE ADJUSTED AS DIRECTED BY THE ENGINEER. LONGITUDINAL REINFORCING, AS SHOWN IN THE TABLE, SHALL BE PROVIDED FOR THE LENGTH OF THE EXTENDED SHAFT AND #4 TIES SHALL BE PROVIDED AT A SPACING NOT TO EXCEED 9" ON CENTERS. PAYMENT WILL BE IN ACCORDANCE WITH SECTION 714 OF THE STANDARD SPECIFICATIONS.

●● IN LIEU OF DESIGNING THE STRUCTURE TO RESIST PERIODIC GALLOPING, A VIBRATORY MITIGATION DEVICE MAY BE PROVIDED BY THE POLE MANUFACTURER. THE VIBRATORY MITIGATION DEVICE SHALL BE AN ANTI-GALLOPING PANEL CONSISTING OF A 60"X18"X0.125" SIGN BLANK MOUNTED NEAR THE END OF THE MAST ARM NOT TO EXCEED ONE QUARTER OF THE LENGTH OF THE MAST ARM FROM THE END OF THE MAST ARM WITH THE LONG AXIS OF THE PANEL COLLINEAR WITH THE LONG AXIS OF THE MAST ARM. THE PANEL SHOULD BE MOUNTED AT SUCH A HEIGHT AS TO PROVIDE AT LEAST 6" CLEAR FROM THE TOP OF ANY SIGNAL ASSEMBLY OR SIGN PANEL LOCATED ON THE MAST ARM WITHIN THE LENGTH OF THE ANTI-GALLOPING PANEL.

TRUCK-INDUCED GUST LOADS SHALL BE EXCLUDED FOR FATIGUE DESIGN FOR ALL STRUCTURES EXCEPT MAST ARMS MOUNTED OVER FACILITIES WITH POSTED SPEEDS OF 65 MPH OR GREATER AT THE LOCATION OF THE STRUCTURE.

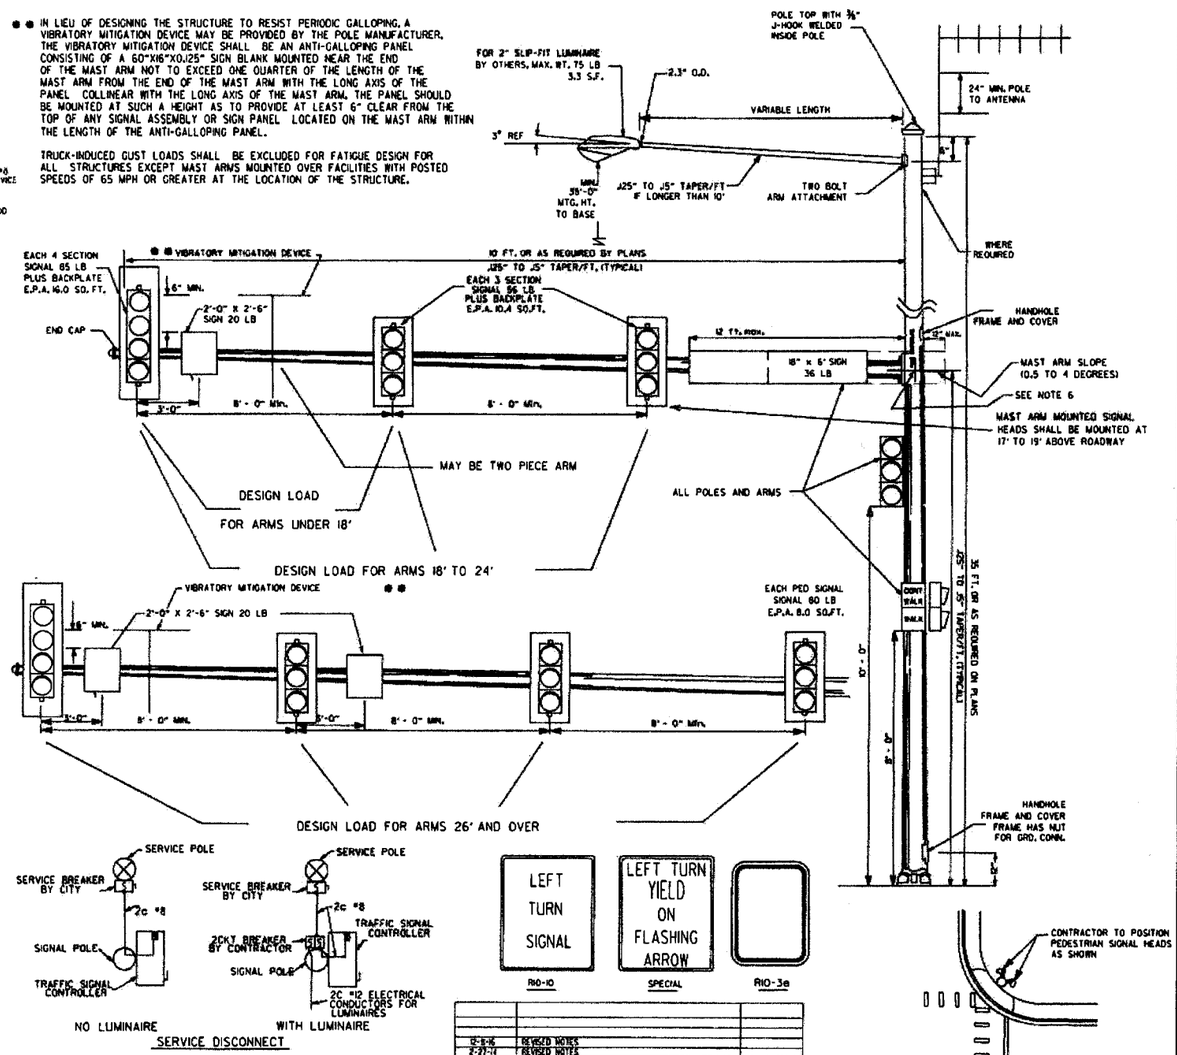

DATE	REVISION	DATE FILM
2-9-16	REVISED NOTES	
2-27-14	REVISED NOTES	
9-12-13	ISSUED AS STANDARD DRAWING	
7-2-12	REVISED TWO SIGNAL HEADS	
3-2-09	REVISED GROUNDING	
2-5-08	REVISED GROUNDING	
4-25-06	ADDED VIBRATORY MITIGATION DEVICE & NOTES	
6-8-06	REVISED ASSIGNED NOTES	
4-17-06	REVISED TO 2001 AASHTO STANDARDS	
10-12-04	REVISED CABINET ORIENTATION	
5-21-04	REVISED	
1-8-04	REV. NOTE 3 (AASHTO REQUIREMENTS)	
6-9-01	REV. NOTES & POLE MAST ARM SLOPE	
4-6-01	REVISED POLE TAPERS	
1-25-00	REV. NOTES & SIGNAL HEAD PLACEMENT	
8-27-99	REVISED FOUNDATION DETAILS	
1-17-96	REVISED DETAILS AND NOTES	
1-21-95	ISSUED	

ARKANSAS STATE HIGHWAY COMMISSION

STEEL POLE WITH MAST ARM

STANDARD DRAWING SD-11

R1-1

STANDARD 30"X30"
EXPRESSWAY 36"X36"
SPECIAL 48"X48"

R1-2

STD. 36"X36"X36"
EXPWY. 48"X48"X48"
FWY. 60"X60"X60"

R2-1



STD. 24"X30"
EXPWY. 36"X48"
FWY. 48"X60"

W3-5

STD. 36"X36"
EXPWY. 48"X48"
FWY. 48"X48"

W3-5a

STD. 36"X36"
EXPWY. 48"X48"
FWY. 48"X48"

R4-1

STD. 24"X30"
EXPWY. 36"X48"
FWY. 48"X60"

R4-2

STD. 24"X30"
EXPWY. 36"X48"
FWY. 48"X60"

R5-1

STD. 30"X30"
EXPWY. 36"X36"
SPECIAL 48"X48"

R11-2

48"X30"

R11-3A



60"X30"

R11-4



60"X30"

RSP-1

48"X30"

W1-1

STD. 36"X36"
FWY. 48"X48"

W1-2

STD. 36"X36"
FWY. 48"X48"

W1-3

STD. 48"X48"

W1-4

STD. 48"X48"

W1-6



STD. 48"X24"
SPECIAL 60"X30"

W1-8

STD. 18"X24"
SPECIAL 24"X30"
EXPWY. 30"X36"
FWY. 36"X48"

W3-1

STD. 36"X36"
SPECIAL 48"X48"

W3-2

STD. 36"X36"
SPECIAL 48"X48"

W4-2



STD. 36"X36"
FWY. 48"X48"

W5-1

STD. 36"X36"
SPECIAL 48"X48"

W6-3

EXPWY. 36"X36"
SPECIAL 48"X48"

W8-7

EXPWY. 36"X36"
FWY. 48"X48"

W9-2

STD. 36"X36"
FWY. 48"X48"

W13-1

STD. 24"X24"

W20-1

STD. 48"X48"

W20-2

STD. 48"X48"

W20-3

STD. 48"X48"

W20-4

STD. 48"X48"

W20-5

STD. 48"X48"

W20-7a

STD. 36"X36"
FWY. 48"X48"

W21-2

STD. 30"X30"
SPECIAL 36"X36"

W21-5

STD. 30"X30"
SPECIAL 36"X36"

W24-1

STD. 36"X36"

W1-4b

STD. 48"X48"

R56-1

STD. 18"X18"

W8-11

STD. 36"X36"
FWY. 48"X48"

W8-9

STD. 36"X36"
FWY. 48"X48"

G20-1



60"X24"

G20-2

48"X24"

OM-3L OM-3R

12"X36"

M4-9

STD. 30"X24"
SPECIAL 48"X36"
SPECIAL 60"X48"

M4-10

48"X18"

R55-1

36"X60"
• USE 6" C LETTERS
•• USE 4" D LETTERS

ADVANCE DISTANCES
(XXXX)

500 FT	½ MILE
1000 FT	¾ MILE
1500 FT	1 MILE
	AHEAD

GENERAL NOTES:

1. ALL TRAFFIC CONTROL DEVICES USED ON ROAD CONSTRUCTION SHALL CONFORM TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, LATEST EDITION, AND TO THE STANDARD HIGHWAY SIGNS, LATEST EDITION, OR AS APPROVED BY THE FEDERAL HIGHWAY ADMINISTRATION.
2. TRAFFIC CONTROL DEVICES SHALL BE SET UP JUST BEFORE THE START OF CONSTRUCTION OPERATIONS AND SHALL BE PROPERLY MAINTAINED DURING THE TIME SUCH CONDITIONS EXIST. THEY SHALL REMAIN IN PLACE ONLY AS LONG AS NEEDED AND REMOVED THEREAFTER.
3. EXISTING SIGNS AND CONSTRUCTION SIGNS SHALL BE KEPT IN PROPER POSITION, AND BE CLEAN AND LEGIBLE AT ALL TIMES. SIGNS THAT DO NOT APPLY TO EXISTING CONDITIONS SHALL BE REMOVED. SIGNS THAT ARE DAMAGED, DEFACED, OR THAT ACCUMULATE DIRT DURING CONSTRUCTION SHALL BE CLEANED, REPAIRED, OR REPLACED.
- 4. SIGNS ARE USUALLY MOUNTED ON A SINGLE POST, ALTHOUGH THOSE WIDER THAN 36" OR LARGER THAN 10 SQ. FT. SHALL BE MOUNTED ON TWO POSTS OR ABOVE A TYPE III BARRICADE.
- 5. SIGN POSTS DIRECT BURIED IN SOIL SHALL BE 2 LB. MINIMUM CHANNEL POST OR 4"x4" WOOD POSTS. CHANNEL POSTS SHALL BE PAINTED GREEN. WOOD POSTS SHALL BE PAINTED WHITE. ALL POSTS SHALL BE NEATLY CONSTRUCTED, AND SHALL BE REPLUMBED, CLEANED, OR REPAIRED AS NEEDED FOR THE DURATION OF THE JOB. THERE SHALL NOT BE MORE THAN 2 POSTS IN A 7' PATH FOR WOOD OR CHANNEL POSTS. ANY CHANNEL POST SPLICE SHALL BE IN ACCORDANCE WITH STANDARD DRAWING TC-3.
6. POST MOUNTED SIGNS IN RURAL AREAS SHALL BE CONSTRUCTED WITH THE NEAR EDGE OF THE SIGN FROM 6 TO 12 FEET FROM THE PAVEMENT EDGE. SIGNS IN URBAN AREAS AND BARRICADE MOUNTED SIGNS SHALL BE MOUNTED A MINIMUM OF 2 FEET FROM THE PAVEMENT EDGE.
7. ALL POST AND BARRICADE MOUNTED SIGNS MOUNTED IN URBAN AREAS SHALL BE MOUNTED A MINIMUM DISTANCE OF 7' FROM THE BOTTOM OF THE SIGN TO THE ROADWAY SURFACE. ALL POST AND BARRICADE MOUNTED SIGNS MOUNTED IN RURAL AREAS SHALL BE MOUNTED A MINIMUM DISTANCE OF 7' FROM THE BOTTOM OF THE SIGN TO THE ROADWAY SURFACE, EXCEPT A MINIMUM OF 6' SHALL BE USED WHEN MOUNTING AN ADVISORY SIGN BELOW A WARNING SIGN. TEMPORARY SIGNS MAY BE MOUNTED ON PORTABLE SUPPORTS FOR INTERMEDIATE TERM STATIONARY WORK CONDITIONS. THE SIGNS MINIMUM MOUNTING HEIGHT SHALL BE 5'. RETROREFLECTIVE DEVICES SHALL BE USED. TEMPORARY SIGNS MAY BE MOUNTED ON PORTABLE SUPPORTS FOR SHORT-TERM, SHORT DURATION, AND MOBILE CONDITIONS. THEY SHALL BE NO LESS THAN ONE (1) FOOT ABOVE THE TRAVELED WAY. LONG-TERM STATIONARY SIGNS SHALL BE DIRECT BURIED IN SOIL, UNLESS CONDITIONS NECESSITATE THE USE OF PORTABLE SIGNS, OR AS APPROVED BY THE ENGINEER. CONCRETE PADS, CONCRETE OR ROCK BALLAST, OR OTHER SOLID MATERIALS SHALL NOT BE UTILIZED WITH PORTABLE SIGN SUPPORTS.
8. FLAGGERS SHALL USE REFLECTORIZED STOP-SLOW PADDLES. FLAGS MAY BE USED ONLY FOR EMERGENCY SITUATIONS.
9. MOST OF THE SIGNS SHOWN ARE ORIENTED TO THE RIGHT. HOWEVER, THIS DOES NOT PRECLUDE THE USE OF MIRROR IMAGES OF THESE SIGNS WHERE THE REVERSE ORIENTATION MIGHT BETTER CONVEY TO MOTORISTS THE PROPER DIRECTION OF MOVEMENT.
10. R55-1 SIGNS SHALL BE PLACED AT LEAST 1500' BUT NOT MORE THAN 1 MILE IN ADVANCE OF THE WORK ZONE. IF A SPEED LIMIT REDUCTION IS IN EFFECT, THE SIGN SHALL BE PLACED A MINIMUM OF 500' IN ADVANCE OF THE "REDUCED SPEED AHEAD" SIGN.

• NOTE: SUPPORTS FOR SIGNS, BARRICADES, AND VERTICAL PANELS THAT ARE DIFFERENT FROM THE REQUIREMENTS SHOWN IN NOTES 4 & 5, BUT MEET THE REQUIREMENTS OF NCHRP-350 OR MANUAL FOR ASSESSING SAFETY HARDWARE (MASH), WILL BE ACCEPTED. COMPLIANCE WITH THE REQUIREMENTS OF NCHRP-350 OR MANUAL FOR ASSESSING SAFETY HARDWARE (MASH) IS REQUIRED FOR ALL PROJECTS.

DATE	REVISION	FILMED
9-2-15	REVISED REDUCED SPEED LIMIT AHEAD SIGNS REVISED ROAD WORK NEXT XX MILES	
12-15-11	REVISED W24-1	
11-17-10	DELETED W8-9a & ADDED W8-9	
10-15-09	ADDED REFERENCE TO MASH & ADDED SIGN W24-1	
4-17-08	REVISED SIGN DESIGNATIONS	
8-18-04	REVISED NOTES	
10-9-03	REVISED NOTE 1	
8-16-01	REVISED NOTE 7	
9-28-00	REVISED NOTE	
8-18-98	ADDED NOTE	
6-26-97	REVISED NOTE 5	
4-03-97	REVISED NOTE 5	
10-18-96	ADDED CONTROLLED ACCESS HWY. SIGN & TO NOTE 7	
10-12-95	ADDED R55-1	
6-8-95	REVISED TO CORRECT SIGN ILLUSTRATIONS	6-8-95
2-2-95	REVISED PER PART VI, MUTCD SEPT. 3, 1993	
8-15-91	DRAWN AND PLACED IN USE	

ARKANSAS STATE HIGHWAY COMMISSION

STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION

STANDARD DRAWING TC-1

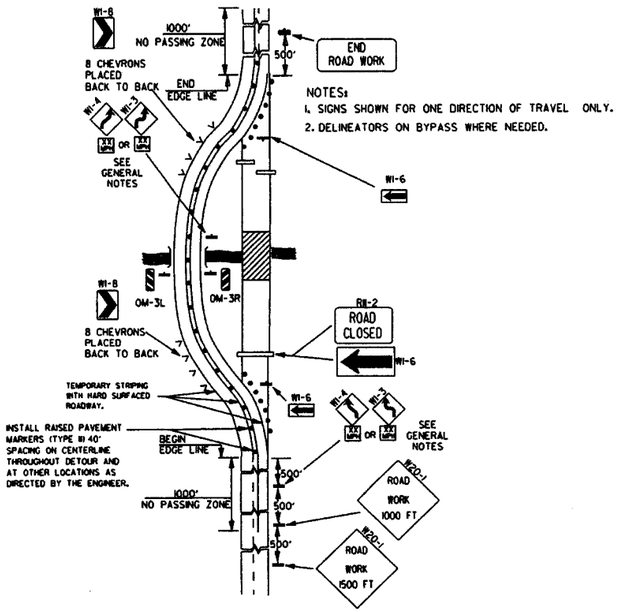

NOTES:
1. SIGNS SHOWN FOR ONE DIRECTION OF TRAVEL ONLY.
2. DELINEATORS ON BYPASS WHERE NEEDED.

(A) TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES ON A 2-LANE HIGHWAY WHERE THE ENTIRE ROADWAY IS CLOSED AND A BYPASS DETOUR IS PROVIDED.

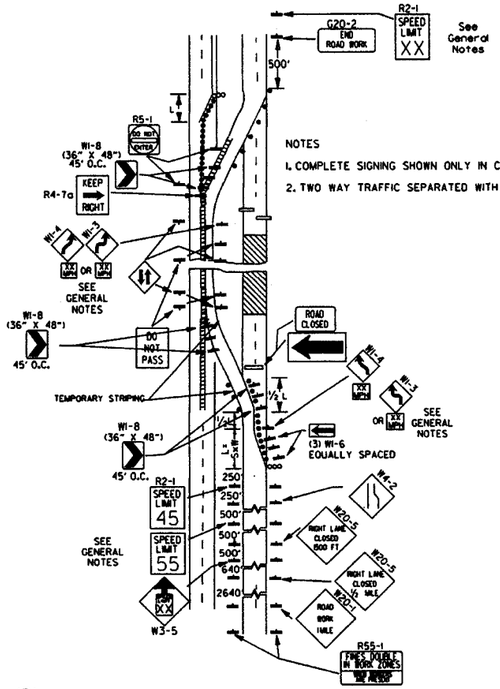

NOTES
1. COMPLETE SIGNING SHOWN ONLY IN CROSSOVER DIRECTION.
2. TWO WAY TRAFFIC SEPARATED WITH POSITIVE BARRIER.

(B) TYPICAL APPLICATION - 4-LANE DIVIDED ROADWAY WHERE ONE ROADWAY IS CLOSED.

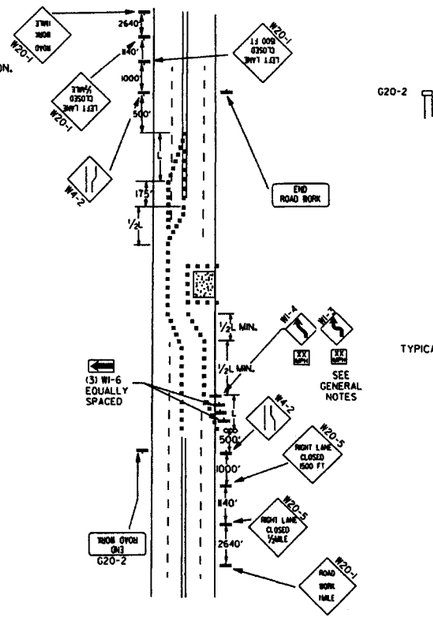

(C) TYPICAL APPLICATION - 4-LANE UNDIVIDED ROADWAY WHERE HALF OF THE ROADWAY IS CLOSED.

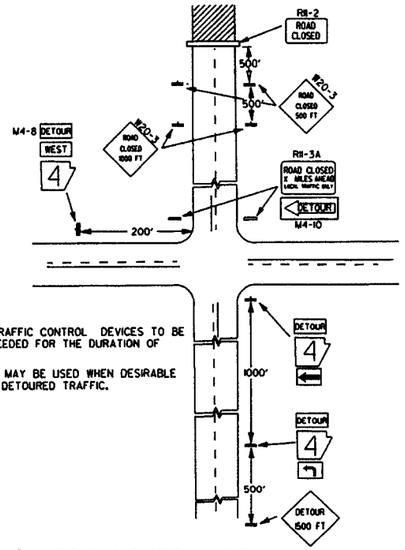

NOTES:
1. REGULATORY TRAFFIC CONTROL DEVICES TO BE MODIFIED AS NEEDED FOR THE DURATION OF THE DETOUR.
2. STREET NAMES MAY BE USED WHEN DESIRABLE FOR DIRECTING DETOURED TRAFFIC.

(D) TYPICAL APPLICATION - ROADWAY CLOSED BEYOND DETOUR POINT.

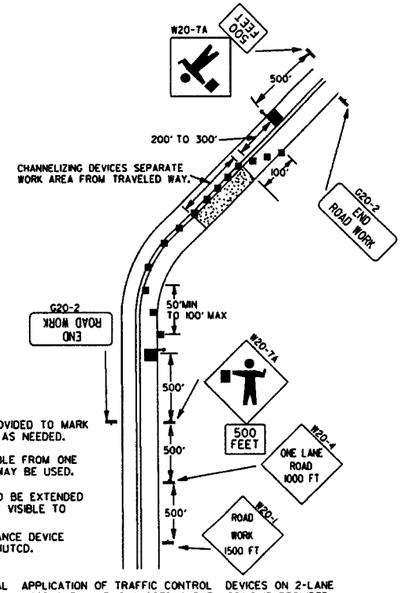

NOTES:
1. FLOOD LIGHTS SHOULD BE PROVIDED TO MARK FLAGGER STATIONS AT NIGHT AS NEEDED.
2. IF ENTIRE WORK AREA IS VISIBLE FROM ONE STATION, A SINGLE FLAGGER MAY BE USED.
3. CHANNELIZING DEVICES ARE TO BE EXTENDED TO A POINT WHERE THEY ARE VISIBLE TO APPROACHING TRAFFIC.
4. AUTOMATED FLAGGER ASSISTANCE DEVICE (AFAD) OPTIONAL. REFER TO MUTCD.

(E) TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES ON 2-LANE HIGHWAY WHERE ONE LANE IS CLOSED AND FLAGGING IS PROVIDED.

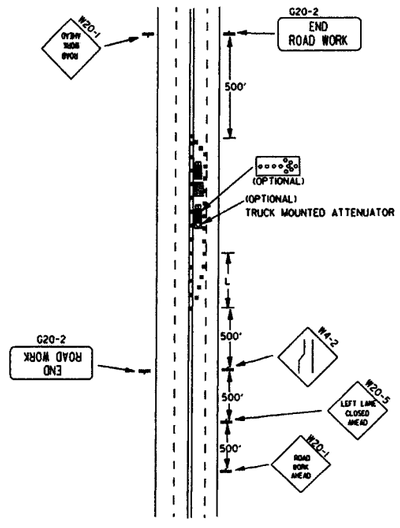

(F) TYPICAL APPLICATION - 4-LANE UNDIVIDED ROADWAY WITH INSIDE LANE CLOSED.

KEY:
- FLAGGER
- POSITIVE BARRIER
- ARROW PANEL (IF REQUIRED)
- TYPE III BARRICADE
- CHANNELIZING DEVICE
- TRAFFIC DRUM
- RAISED PAVEMENT MARKER

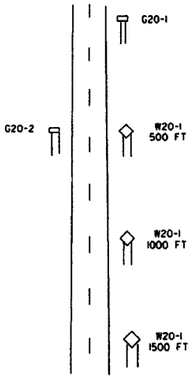

TYPICAL ADVANCE WARNING SIGN PLACEMENT

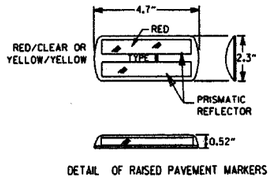

DETAIL OF RAISED PAVEMENT MARKERS

TAPER FORMULAE:

L=SXW FOR SPEEDS OF 45MPH OR MORE.

$L = \frac{WS^2}{60}$ FOR SPEEDS OF 40MPH OR LESS.

WHERE:
L= MINIMUM LENGTH OF TAPER.
S= NUMERICAL VALUE OF POSTED SPEED LIMIT PRIOR TO WORK OR 85TH PERCENTILE SPEED.
W= WIDTH OF OFFSET.

GENERAL NOTES:
1. ADVISORY SPEED POSTED ON W1-3 OR W1-4 CURVE WARNING SIGNS TO BE DETERMINED AT SITE. USE W1-4 WHEN SPEED IS GREATER THAN 30MPH AND W1-3 WHEN 30MPH OR LESS.
2. WHEN THE EXISTING SPEED LIMIT IS 55MPH AND THE PLANS REQUIRE A SPEED LIMIT OF 45MPH, THE R2-K55) SHALL BE OMITTED AND THE W3-5 SHALL BE INSTALLED AT THAT LOCATION. ADDITIONAL R2-145MPH SPEED LIMIT SIGNS SHALL BE INSTALLED AT A MAXIMUM OF 1MILE INTERVALS. AT THE END OF THE WORK AREA A R2-KXX) SHALL BE INSTALLED TO MATCH ORIGINAL SPEED LIMIT.
3. WHEN THE EXISTING SPEED LIMIT IS 65MPH AND THE PLANS REQUIRE A SPEED LIMIT OF 55MPH, THE R2-K45) SHALL BE OMITTED. ADDITIONAL R2-155MPH SPEED LIMIT SIGNS SHALL BE INSTALLED AT A MAXIMUM OF 1MILE INTERVALS. AT THE END OF THE WORK AREA A R2-KXX) SHALL BE INSTALLED TO MATCH ORIGINAL SPEED LIMIT.
4. THE MAXIMUM SPACING BETWEEN CHANNELIZING DEVICES IN A TAPER SHOULD BE APPROXIMATELY EQUAL IN FEET TO THE SPEED LIMIT. BEYOND THE TAPER, MAXIMUM SPACING SHALL BE TWO TIMES THE SPEED LIMIT, OR AS DIRECTED BY THE ENGINEER.
5. WARNING LIGHTS AND/OR FLAGS MAY BE MOUNTED TO SIGNS OR CHANNELIZING DEVICES AT NIGHT AS NEEDED.
6. PAVEMENT MARKINGS NO LONGER APPLICABLE WHICH MIGHT CREATE CONFUSION IN THE MINDS OF VEHICLE OPERATORS SHALL BE REMOVED OR OBLITERATED AS SOON AS PRACTICABLE.
7. TRAILER MOUNTED DEVICES SUCH AS ARROW PANELS AND PORTABLE CHANGEABLE MESSAGE SIGNS SHALL BE DELINEATED BY AFFIXING CONSPICUITY MATERIAL IN A CONTINUOUS LINE ON THE FACE OF THE TRAILER. WHEN PLACED ON OR ADJACENT TO THE SHOULDER AND NOT BEHIND A POSITIVE BARRIER, THESE DEVICES SHALL BE DELINEATED BY PLACING FIVE (5) TRAFFIC DRUMS, EQUALLY SPACED ALONG THE TRAFFIC SIDE OF THE DEVICE.
8. DIMENSIONS SHOWN FOR RAISED PAVEMENT MARKERS ARE TYPICAL. THE CONTRACTOR MAY SUBSTITUTE SIMILAR MARKERS WITH THE APPROVAL OF THE ENGINEER. REQUESTING APPROVAL FOR SIMILAR MARKERS MAY BE MADE BY REFERRING TO THE AHTD QUALIFIED PRODUCTS LIST.

DATE	REVISION	FILMED
9-2-15	REVISED NOTE 2, ADDED NOTE 8, REVISED DRAWING (A) & REPLACED R2-5A WITH W3-5	
9-12-13	REVISED DETAIL OF RAISED PAVEMENT MARKERS	
3-8-10	ADDED (AFAD)	
8-20-08	REVISED SIGN DESIGNATIONS	
8-18-04	ADDED GENERAL NOTE	
10-18-96	ADDED R55-1	
4-26-96	CORRECTED (a) BEHIND G20-2	
6-8-95	CORRECTED SIGN IDENT. ON W1-4A	6-8-95
2-2-95	REVISED PER PART VI, MUTCD, SEPT. 3, 1993	
8-15-91	DRAWN AND PLACED IN USE	

ARKANSAS STATE HIGHWAY COMMISSION

STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION

STANDARD DRAWING TC-2

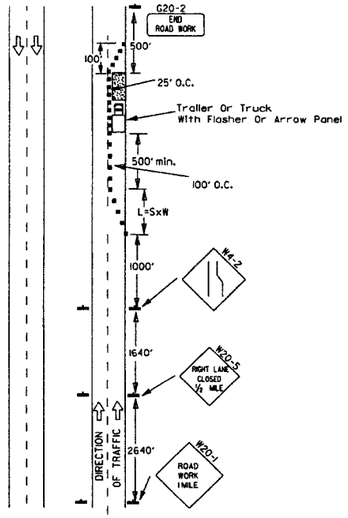

(A) Typical application - daytime maintenance operations of short duration on a 4-lane divided roadway where half of the roadway is closed.

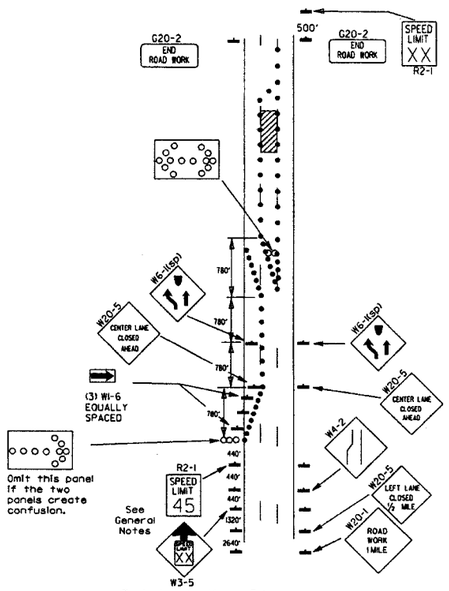

(B) Typical application - 3-lane oneway roadway where center lane is closed.

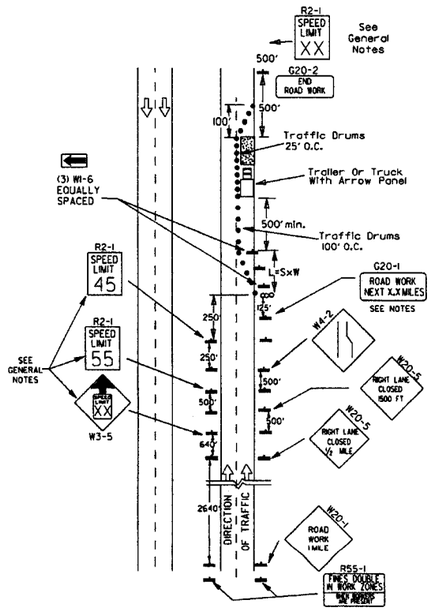

(C) Typical application - construction operations of intermediate to long term duration on a 4-lane divided roadway where half of the roadway is closed.

KEY:

- Arrow Panel (If Required)
- ■ Channelizing Device
- ● Traffic drum

GENERAL NOTES:

1. A speed limit reduction may be implemented ONLY when designated in the plan or when recommended by the Roadway Design Division.
2. When the existing speed limit is 55mph and the plans require a speed limit of 45mph, the R2-1(55) shall be omitted and the W3-5 shall be installed at that location. Additional R2-1 45mph speed limit signs shall be installed at a maximum of 1 mile intervals. At the end of the work area a R2-1(XX) shall be installed to match original speed limit.
3. When the existing speed limit is 65mph and the plans require a speed limit of 55mph, the R2-1(45) shall be omitted. Additional R2-1 55mph speed limit signs shall be installed at a maximum of 1 mile intervals. At the end of the work area a R2-1(XX) shall be installed to match original speed limit.
4. The maximum spacing between channelizing devices in a taper should be approximately equal in feet to the speed limit. Beyond the taper, maximum spacing shall be two times the speed limit or as directed by the Engineer.
5. Warning lights and/or flags may be mounted to signs or channelizing devices at night as needed.
6. Pavement markings no longer applicable which might create confusion in the minds of vehicle operators shall be removed or obliterated as soon as practicable.
7. The G20-1 sign will be required on jobs of over two miles in length. When the lane closure is not at the beginning of the project, the G20-1 sign shall be erected 125' in advance of the job limit. Additional W20-1 (1 MILE) signs are not required in advance of lane closures that begin inside the project limits.
8. Flaggers shall use STOP/SLOW paddles for controlling traffic through work zones. Flags may be used only for emergency situations.
9. All plastic drums and cones shall meet the requirements of NCHRP-350 or Manual For Assessing Safety Hardware (MASH).
10. Trailer mounted devices such as arrow panels and portable changeable message signs shall be delineated by affixing conspicuity material in a continuous line on the face of the trailer. When placed on or adjacent to the shoulder and not behind a positive barrier, these devices shall be delineated by placing five (5) traffic drums, equally spaced along the traffic side of the device.

Channelizing devices



* When cones are used on freeways and multi-lane highways, they shall be 28" min. During hours of darkness, 28" cones shall be used on all roadways, and shall be reflectorized in accordance with the M.U.T.C.D.









NOTE: For all road closures, the Type III barricades shall be of sufficient length to extend across entire roadway.



TRAFFIC CONTROL DEVICES FOR VERTICAL PAVEMENT DIFFERENTIALS

VERTICAL DIFFERENTIAL	LOCATIONS	TRAFFIC CONTROL
1" to 3"	Centerline, lane lines	WB-11
1" to 3"	Edge of shoulder	WB-9
Greater than 3"	Lane lines	Standard lane closure required
Greater than 3"	Edge of traveled lane	*RSP-1 and vertical panels, drums or concrete barrier
Greater than 3"	Edge of shoulder	*Vertical panels, drums or concrete barrier

* When shown on the plans concrete barrier will be used.

When the shoulder area is used as part of the traveled lane and there is insufficient width to place drums on the remaining shoulder width, then vertical panels shall be used.

FLAG



Flag shall be of good grade red material

VERTICAL PANEL PLACEMENT

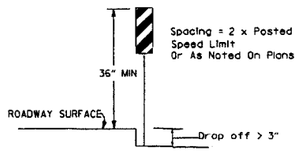

STOP SLOW PADDLE

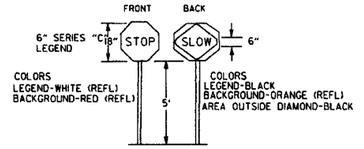

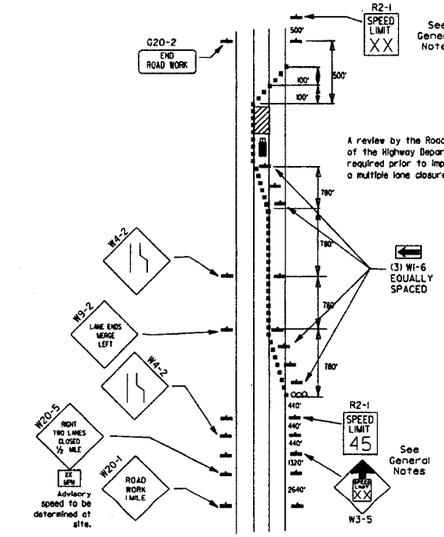

(D) Typical application - closing multiple lanes of a multilane highway.

DETAIL OF SPLICES

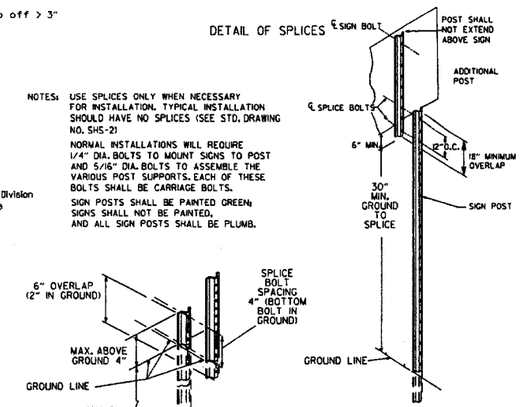

NOTES: USE SPLICES ONLY WHEN NECESSARY FOR INSTALLATION. TYPICAL INSTALLATION SHOULD HAVE NO SPLICES (SEE STD. DRAWING NO. SHS-2)

NORMAL INSTALLATIONS WILL REQUIRE 1/4" DIA. BOLTS TO MOUNT SIGNS TO POST AND 5/16" DIA. BOLTS TO ASSEMBLE THE VARIOUS POST SUPPORTS. EACH OF THESE BOLTS SHALL BE CARRIAGE BOLTS.

SIGN POSTS SHALL BE PAINTED GREEN; SIGNS SHALL NOT BE PAINTED, AND ALL SIGN POSTS SHALL BE PLUMB.

DATE	REVISION	FILMED
9-2-15	REVISED NOTE 2 & REPLACED R2-5A WITH W3-5	
10-15-09	ADDED REFERENCE TO MASH	
11-20-08	REVISED SIGN DESIGNATIONS	
11-18-04	ADDED NOTE	
10-1-98	ADDED NOTE	
4-03-97	ADDED (SP) TO W6-1& REVISED TRAFFIC CONTROL DEVICES NOTE	
10-18-96	ADDED R55-1	
10-12-95	MOVED UPPER SPLICE	
6-8-95	REVISED SPLICE DETAIL, TEXT	6-8-95
2-2-95	REVISED PER PART VI, MUTCD, SEPT. 3, 1993	
8-15-91	DRAWN AND PLACED IN USE	

ARKANSAS STATE HIGHWAY COMMISSION

STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION

STANDARD DRAWING TC-3