


Exp. Joint  
90' Max Spa.

18"  
Contraction Jt.  
30' Max. Spa.

Membrane Waterproofing  
Type C or approved  
equal. As an alternate  
the contractor may use  
the waterstop shown for  
the exp. j.t.

### Retaining Wall Joints

For extremely high walls or at  
other locations where differential  
deflection is considered to be a  
problem; positive deflection control  
dowel bars or another method may  
be used.

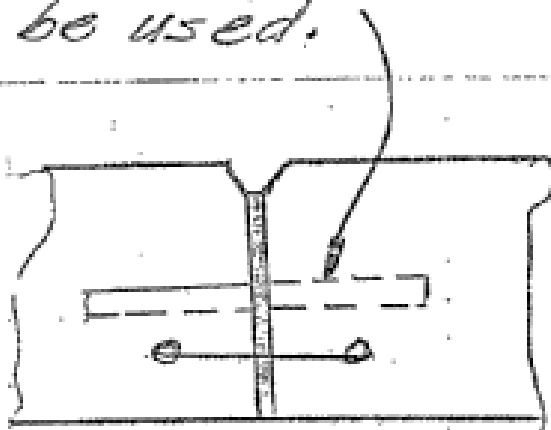

2/7/80

Not  
Revised

