DATE: January 26, 1989


TO: BRIDGE DIVISION PERSONNEL

FROM: Veral Pinkerton, Bridge Engineer


SUBJECT: Sidewalk Curb

Unless directed to use a barrier curb slope, a Type C curb shape should be used when a sidewalk is required on a bridge.


FMH:bw

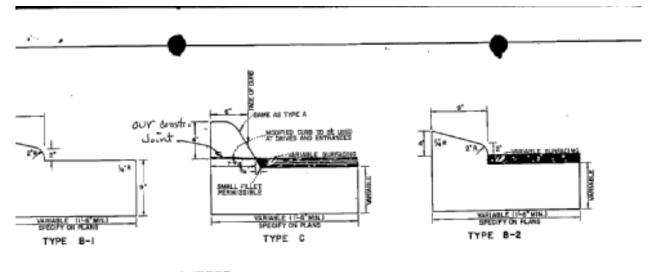


MBINATION CURB AND GUTTER

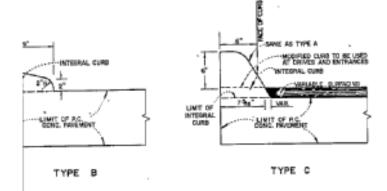

FEGRAL CURB





NCRETE CURB

ΕВ

IA	E		
1	72	PINCA.	1
	*4 BMS- _37	1	1 Mag

LONGITUDINAL SECTION

ALTERNATE CONSTRUCTION FOR INTEGRAL CUR

		_
7-15-31	REVISED VICUNED CURE	13077468
11-1-72 10-0-72 10-0-72	REVISED MOCIFIED GARS FEVISED MD REDRAWN REVISION	547E PEMID